


The Benchmark of Quality®




This is my BendPak



There are many, but this one's mine.

"If you're going to put your wheels through hell, be sure you've got the rock-solid muscle to bring them back to life. BendPak lifts are built as ruthless as the road itself. Never compromise."

– Bill Goldberg, Professional Athlete & TV Host

 @Goldberg

SCAN TO WATCH
THE VIDEO NOW



BendPak®
PROVIDING AUTOMOTIVE SERVICE SOLUTIONS

Table of Contents

4-5	Medium-Duty Clear Floor Lifts
6-7	Medium-Heavy Floor Plate Lifts
8-9	Heavy-Duty Clear Floor Lifts
10-11	4-Post Light-Duty Lifts & Accessories
12-13	4-Post Light-Duty Lifts
14-15	4-Post Heavy-Duty Lifts
16-17	Alignment Lifts
18	This is my BendPak
19	Image Gallery
20-21	Quatra Scissors
22-23	Low-Rise & Mid-Rise Lifts
24-25	Parking & Storage
26	Rolling Bridge Jacks
27	Portable Column Lift
28-29	Pipe Benders
30-31	Air Compressors
32	Power Units
33	QuickJack
34-35	Tire Changers
36	Tire Repair / Brake Lathes
37	Wheel Balancers / Wheel Aligner
38-39	Floor Jacks / Transmission Jacks
40	Jacks Stands
41	Motorcycle Lifts
42	Tool Storage
43	Work Benches
44	Carts & Dollies / Shop Presses
45	Hose Reels
46	Oil Drains / Oil Filter Crushers
47	Parts Washer
48	Wheel Balancer / Rolling Creeper / Work Seat / Tire Changers
49	Engine Support / Engine Stand / Shop Crane
50-51	Manufacturing Superiority

GENERAL DISCLAIMER

BENDPAK/RANGER warrants to the original purchaser only that all products shown in this catalog conform to BENDPAK/RANGER published specifications and are free from defects in material or workmanship. In no event will BENDPAK/RANGER be liable to you or to anyone else for any decision made or action taken by you or anyone else in reliance on information obtained from this catalog. BENDPAK/RANGER has exclusive title and ownership rights, including all intellectual property right, throughout the world in all material and content contained on these pages. Materials, design, specifications, images and other content within this catalog are subject to change. BENDPAK/RANGER does not take responsibility for improper use or any results thereof. BENDPAK/RANGER products are provided and sold as is without any express or implied warranties including warranties of merchantability or fitness for particular purpose. In no event will BENDPAK/RANGER be liable for any special, incidental, or consequential damages based on breach of warranty, breach of contract, negligence, strict tort, or any other legal theory. Damages that BENDPAK/RANGER will not be responsible for include, but are not limited to: loss of profits; loss of savings or revenue; loss of use of the product or any associated equipment; cost of capital; cost of any substitute equipment, facilities, or services; downtime; the claims of third parties, including customers; and injury to property. This limitation does not apply to damages caused by breach of the warranty of title and against infringements or to claims for personal injury. Unless modified in a writing signed by both parties, it is understood that BENDPAK/RANGER published warranties are to be the complete and exclusive agreement between the parties.

For complete and full warranty details contact BENDPAK/RANGER at 1-805-933-9970 or visit www.bendpak.com



Medium-Duty Clear Floor

SERIES FEATURES:

- Wide or narrow configuration
- Exclusive "Tru-Metric" arms
- Single-point safety release
- Dual "Direct-Drive" cylinders
- Electric / hydraulic power
- 17" x 19" A36 steel base plate
- UHMW polyethylene bearings
- Dual 3"- spaced safety locks
- Automatic arm restraints
- Heavy-duty aircraft cable
- Oversized sheave diameter
- Padded safety-shutoff bar
- 8-piece truck and van adapters
- Triple-telescoping / low-pro arms
- Contact pads
- Stackable adapters
- Single piece columns
- Optional foot guards
- Accommodates a wide variety of vehicles assemblies
- Safety locks in each column



**XPR-7TR
Turf Lift**

Lifting Capacity - 7,000 lbs.
Max. Lift Height - 73"
Width - 145" / Height - 145"



**XPR-10
Clear Floor**

Lifting Capacity - 10,000 lbs.
Max. Lift Height - 73"
Width - 132" or 145" / Height - 145"



**XPR-10-LP
Clear Floor Low-Pro Arms**

Lifting Capacity - 10,000 lbs.
Max. Lift Height - 73"
Width - 132" or 145" / Height - 145"



**XPR-10A
Asymmetric**

Lifting Capacity - 10,000 lbs.
Max. Lift Height - 73"
Width - 132" or 145" / Height - 145"



**XPR-10A-LP
Asymmetric
Low-Pro Arms**

Lifting Capacity - 10,000 lbs.
Max. Lift Height - 73"
Width - 132" or 145" / Height - 145"



**2-stage low-profile arms
featured on LP lift models**



**XPR-10-168
Clear Floor Extended Height**

**XPR-10A-168
Asymmetric Extended Height**

Features bolt-on top
extension for added
24" clearance

**XPR-10-LP
XPR-10A-LP**
Feature low-profile arms


ACCESSORIES:



Tuf-Pads



Steel Lift Pads



Frame Cradle Pads



Offset Adapters




Air / Electric Work Station


XPR-10A
Shown with air / electric
work station and foot guards



CE



FREE truck and van adapters come
standard with all BendPak 2-post lifts

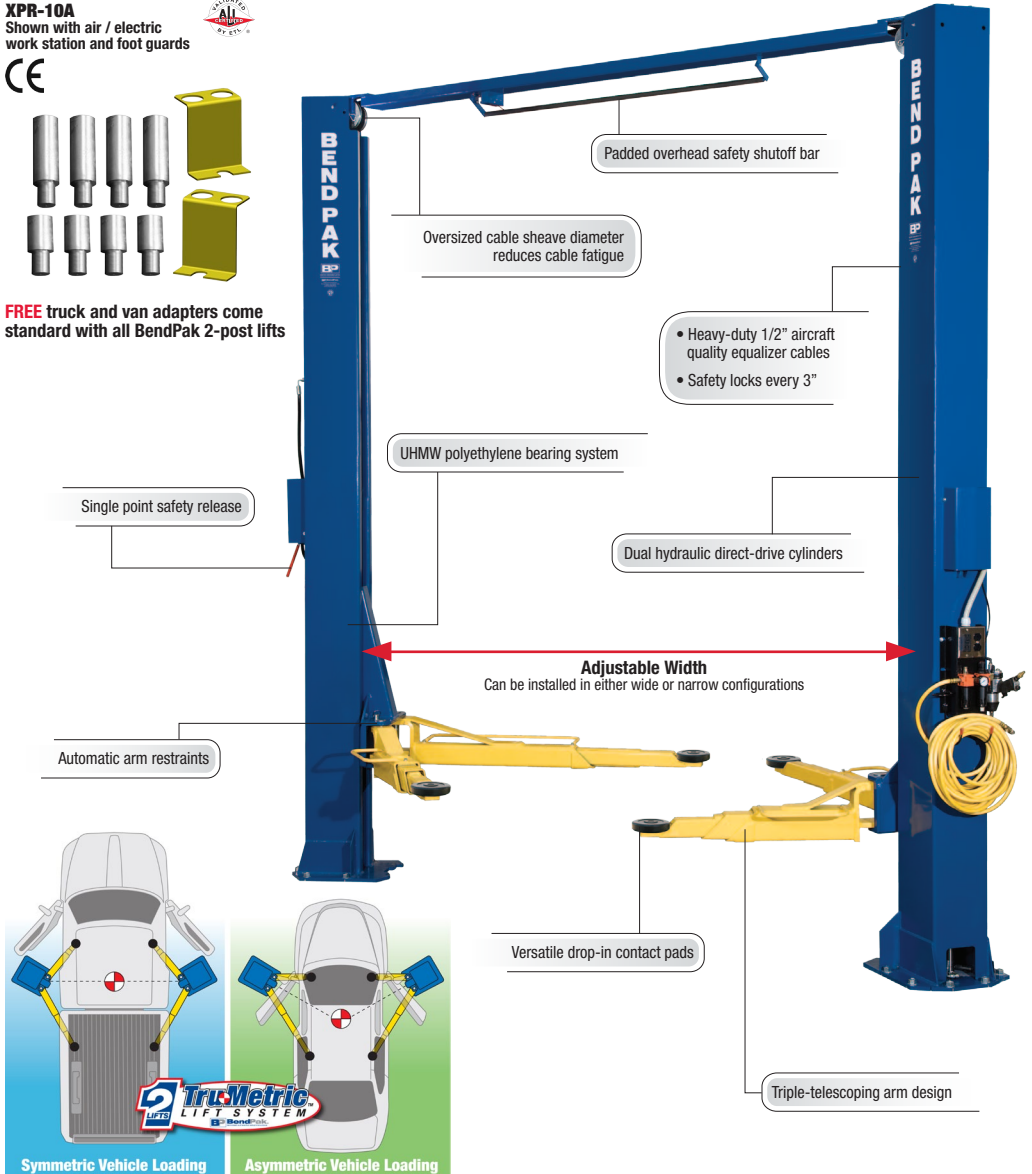


Medium-Heavy Floor Plate

SERIES FEATURES:

- Adjustable width design
- Dual hydraulic lifting cylinders
- Single-piece columns
- Single point safety release
- Drop-end arms provide a lower pad height
- Triple-telescoping arms
- Electric / hydraulic system
- Self-lubricating dura-glide UHMW polyethylene bearing system
- Dual 3"- spaced safety locks
- Automatic arm restraints
- Truck and van adapters
- Versatile drop in contact pads
- Adjustable wide or narrow drive-thru configurations
- Durable powder coat finish
- Open top design
- Large steel base plates
- Heavy-duty 3/8" equalizer cables
- Rugged steel construction



Arms shown with optional foot guards

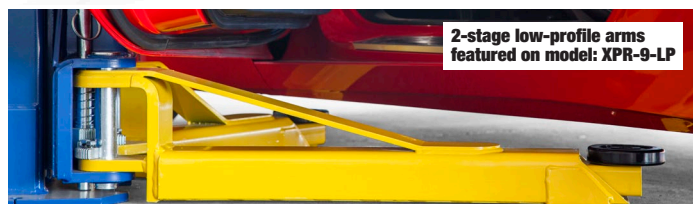


ACCESSORIES:



Tuf-Pads



Steel Lift Pads



Frame Cradle Pads



Offset Adapters



Air / Electric Work Station

XPR-9D
Shown with air / electric
work station and foot guards



- Heavy-duty dual 3/8" equalizer cables
- Safety locks every 3"

Oversized cable sheave diameter
reduces cable fatigue

Dual hydraulic direct-drive cylinders

UHMW polyethylene bearing system

Automatic arm restraints


Single point safety release

Versatile drop-in contact pads

Low profile floor plate

Triple-telescoping arm design

FREE truck and van adapters come
standard with all BendPak 2-post lifts



Heavy-Duty Clear Floor

SERIES FEATURES:

- Dual-synchro equalization system
- Electric / hydraulic power system
- UHMW polyethylene bearings
- Single-piece columns
- Dual "Direct-Drive" cylinders
- Single point safety release
- Automatic arm restraints
- 8-piece truck and van adapters
- Oversized column base plates
- Padded safety-shutoff bar
- Safety locks in each column
- Heavy-duty 1/2" equalizer cables
- Powder coat finish
- Rubber door bumpers
- Versatile drop in contact pads with convenient storage
- Triple-telescoping arms / XPR-12C
- Extended height top-beam provides greater overhead clearance
- Oversized cable sheave diameter
- Rubber lift pads with stackable adapters



XPR-12C

Frame cradle pads come standard

Lifting Capacity - 12,000 lbs.
Max. Lift Height - 74"
Width - 155" / Height - 170"



XPR-15C

Frame cradle pads come standard

Lifting Capacity - 15,000 lbs.
Max. Lift Height - 74"
Width - 155" / Height - 170"



XPR-18C

Frame cradle pads come standard

Lifting Capacity - 18,000 lbs.
Max. Lift Height - 74"
Width - 155" / Height - 170"



ACCESSORIES:



Tuff-Pads



Frame Cradle Pads



Mobile High-Lift Jack Stand



Steel Lift Pads



Air / Electric Work Station



XPR-12C-192
XPR-15C-192
XPR-18C-192
 Features bolt on
 top extension for
 added 24" clearance



Padded overhead safety shutoff bar

Oversized cable sheave diameter
 reduces cable fatigue

- Heavy-duty 1/2" aircraft-quality equalizer cables
- Safety locks every 3"

Automatic arm restraints

UHMW polyethylene bearing system


Durable rubber lift pads

Dual hydraulic direct-drive cylinders

Adapter storage

Oversized A36 steel base plates

Single point safety release



FREE truck and van adapters come
 standard with all BendPak 2-post lifts

4-Post Light-Duty

SERIES FEATURES:

- Runways feature non-skid surface
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features 1-1/4" sheave axles
- Features heavy-duty 3/8" aircraft cable
- Internal "anti-sway" slider blocks in each column
- Electric / hydraulic power system
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive through ramps option available
- 36" approach ramps available
- Durable powder coat finish
- Rugged steel construction
- High-speed lifting



**HD-7P
Narrow**

Lifting Capacity - 7,000 lbs.
Max. Lift - 82" / Runway Length - 164"
Width - 99.75" / Length - 189"



**HD-7W
Wide**

Lifting Capacity - 7,000 lbs.
Max. Lift - 82" / Runway Length - 164"
Width - 110.25" / Length - 189"



**HD-7PXW
Super Tall**

Lifting Capacity - 7,000 lbs.
Max. Lift - 140" / Runway Length - 188"
Width - 110.25" / Length - 213"



HD-7500BL



**HD-7500BL
Boat Storage**

Lifting Capacity - 7,500 lbs.
Max. Lift - 70" / Runway Length - 164"
Width - 132" / Length - 200"



**HD-7500BLX
Boat Storage**

Lifting Capacity - 7,500 lbs.
Max. Lift - 82" / Runway Length - 188"
Width - 132" / Length - 224"



**HD-7PXM
Super Tall**

Lifting Capacity - 7,000 lbs.
Max. Lift - 140" / Runway Length - 188"
Width - 99.75" / Length - 213"




**HD-7500PBX
Boat Storage**


Lifting Capacity - 7,500 lbs.
Max. Lift - 140" / Runway Length - 188"
Width - 132" / Length - 224"

Options/Accessories


ACCESSORIES:




Jack Platform



Caster Kit



RJ-45 Rolling Bridge Jack



Aluminum Deck




Drip Trays




Caster Kit
Fits HD-7 & HD-9 Series



RJ-45
Rolling Bridge Jack



JP-3 Jack Platform




JP-6 Jack Platform



WSA-100
Air Electric Work Station




Solid Aluminum Decks



Aluminum Approach Ramps



Extended Steel
Approach Ramps




Extended Aluminum
Approach Ramps


4-Post Light-Duty

SERIES FEATURES:


- Freestanding or bolt-down design
- Runways feature non-skid surface
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features 1-1/4" sheave axles
- Internal "anti-sway" slider blocks in each column
- Features heavy-duty 3/8" aircraft cable
- Longer ramps for low ground clearance vehicles
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive through ramps option available
- 36" approach ramps available
- Perfect for parking, storage and service

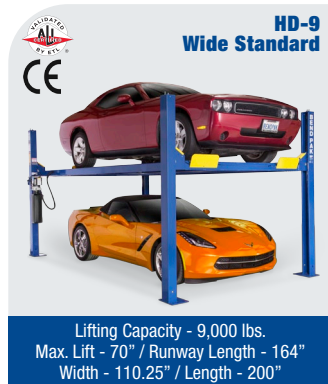


ACCESSORIES:




Jack Platform



Caster Kit



RJ-45 Rolling Bridge Jack



Aluminum Deck




Drip Trays

CE **HD-9SW**
Double Wide Standard

Lifting Capacity - 9,000 lbs.
Max. Lift - 70" / Runway Length - 164"
Width - 202" / Length - 200"

CE **HD-9SWX**
Double Wide Tall Long

Lifting Capacity - 9,000 lbs.
Max. Lift - 82" / Runway Length - 188"
Width - 202" / Length - 224"

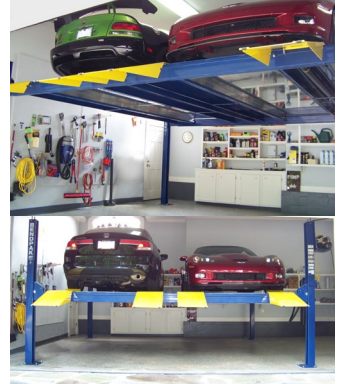

HD-9 Series



Oversize self-lubricating cable sheaves

- Push button pneumatic safety release
- Electric/hydraulic power system
- Optional power unit locations

Rugged 1-1/4" roller axles

Independent backup slack-cable safety latches

Adjustable lock ladders

Optional rolling bridge jacks

Longer approach ramps

- Heavy-duty 3/8" aircraft cables
- Multi-position safety locks



See it on the BendPak / Ranger YouTube Page

4-Post Heavy-Duty

SERIES FEATURES:

- Adjustable runway widths
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features heavy-duty aircraft cable
- Runways feature non-skid surface
- Internal "anti-sway" slider blocks in each column
- Longer ramps for low ground clearance vehicles
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Features heavy-duty sheave axles
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive through ramps option available
- 48" approach ramps available
- Customizable power unit location

HDS-14 Standard



Lifting Capacity - 14,000 lbs.
Max. Lift - 70" / Runway Length - 199"
Width - 130" / Length - 241"

HDS-14X Extended Length



Lifting Capacity - 14,000 lbs.
Max. Lift - 70" / Runway Length - 229"
Width - 130" / Length - 271"

HD-14T Super Tall



Lifting Capacity - 14,000 lbs.
Max. Lift - 82" / Runway Length - 191"
Width - 126" / Length - 234"

HDS0-14 Open Front Plain Deck



Lifting Capacity - 14,000 lbs.
Max. Lift - 70" / Runway Length - 199"
Width - 143" / Length - 244"

HDS-18



Lifting Capacity - 18,000 lbs.
Max. Lift - 60" / Runway Length - 203"
Width - 154" / Length - 241"

HDS-18X



Lifting Capacity - 18,000 lbs.
Max. Lift - 60" / Runway Length - 323"
Width - 154" / Length - 357"

HDS-27



Lifting Capacity - 27,000 lbs.
Max. Lift - 60" / Runway Length - 263"
Width - 154" / Length - 297"

HDS-27X



Lifting Capacity - 27,000 lbs.
Max. Lift - 60" / Runway Length - 323"
Width - 154" / Length - 357"

HDS-35




Lifting Capacity - 35,000 lbs.
Max. Lift - 60" / Runway Length - 263"
Width - 154" / Length - 297"

ACCESSORIES:



Rolling Bridge Jack



DP-30 Rolling Oil Drain



Air / Electric Work Station



Rolling Bridge Airline Kit



HDS-35X

Lifting Capacity - 35,000 lbs.
Max. Lift - 60" / Runway Length - 323"
Width - 154" / Length - 357"




HDS-40

Lifting Capacity - 40,000 lbs.
Max. Lift - 60" / Runway Length - 263"
Width - 154" / Length - 297"



HDS-40X

Lifting Capacity - 40,000 lbs.
Max. Lift - 60" / Runway Length - 323"
Width - 154" / Length - 357"

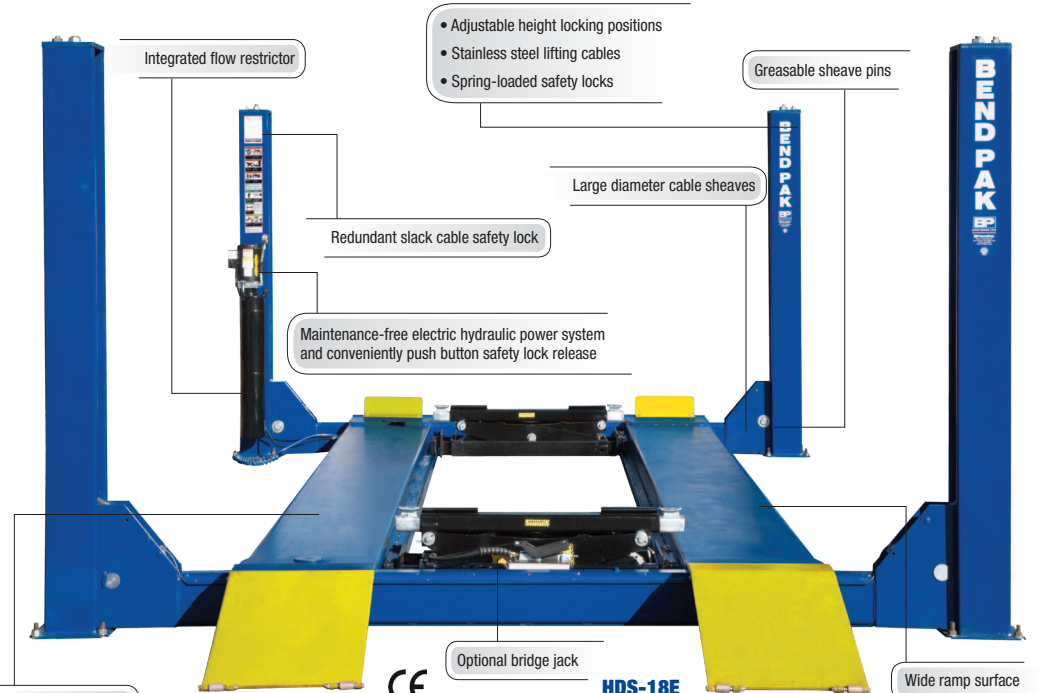

HDS-18E

Lifting Capacity - 18,000 lbs.
Max. Lift - 60" / Runway Length - 263"
Width - 154" / Length - 297"


Alignment Lifts

SERIES FEATURES:

- Runways adjust to different widths
- Multi auto-level locking positions
- Single hydraulic cylinder
- Fully enclosed lifting cables and sheaves
- Pneumatic push-button safety release
- Heavy-duty aircraft cable
- Runways feature non-skid surface
- Self-lubricating cable sheaves
- Oversized sheave diameter
- Features heavy-duty sheave axles
- Fully adjustable lock stops
- Drive through ramps available
- Rolling bridge airline kit available
- Roll back kit available




Equipped with rear slip plates and galvanized front turn plates

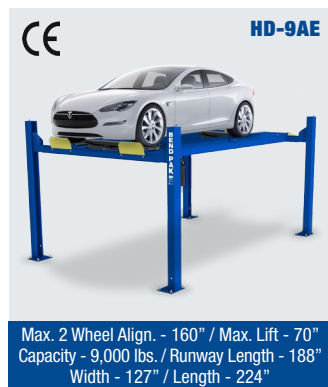

ACCESSORIES:



Rolling Bridge Jack



DP-30 Rolling Oil Drain



Air / Electric Work Station



Rolling Bridge Airline Kit



HDS-27XA

Max. 2 Wheel Align. - 271" / Max. Lift - 60"
Capacity - 27,000 lbs. / Runway Length - 323"
Width - 154" / Length - 357"



HDS-35A

Max. 2 Wheel Align. - 211" / Max. Lift - 60"
Capacity - 35,000 lbs. / Runway Length - 263"
Width - 154" / Length - 297"



HDS-35XA

Max. 2 Wheel Align. - 271" / Max. Lift - 60"
Capacity - 35,000 lbs. / Runway Length - 323"
Width - 154" / Length - 357"

- Single hydraulic cylinder
- Simple push-button lock release
- Maintenance-free power system
- Easy-to-reach operator controls

Integrated hydraulic flow restrictor

Non-skid approach ramps

Full floating galvanized turn plates

Non-skid runways

Durable powder coat finish

Recessed full floating slip plates

Optional bridge jack

Dual-hub cable sheaves

- Adjustable height locking positions
- Stainless steel lifting cables
- Spring-loaded safety locks



HDS-18EA

Shown with rolling bridge jacks

Max. 2 Wheel Align. - 271" / Max. Lift - 60"
Capacity - 18,000 lbs. / Runway Length - 323"
Width - 154" / Length - 297"

This is my BendPak



***There are many,
but this one's mine.***


"Nothing I do or drive is stock. Everything that comes out of my shop has to be the best. That's why me and my crew use BendPak products to customize every vehicle we touch. It's a name I trust."



— Jesse James, West Coast Choppers
www.westcoastchoppers.com



BendPak®
PROVIDING AUTOMOTIVE SERVICE SOLUTIONS

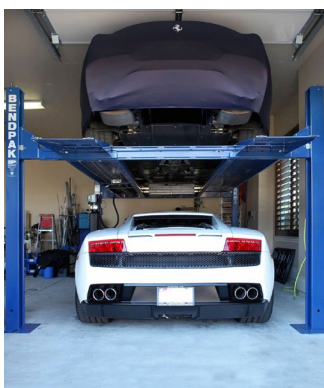


Quatra Scissors

SERIES FEATURES:

- 12,000 lbs. lifting capacity
- Extended runway design
- Durable powder coat finish
- Multi-position runway work steps
- Non-skid runways for sure grip
- Electric / hydraulic power system
- Integrated velocity fuses for cylinders
- Power console with simple controls
- Open center design
- Quad automatic safety locks with pneumatic push-button release
- Lubricated bearing on all pivot points
- Rugged steel legs
- Can be flush mounted or recessed
- Easy to use and understand
- High efficiency hydraulic power unit
- Equipped with rear slip plates and galvanized front turn plates
- Straight up vertical lifting
- Multi-position automatic leveling system
- Easy access to components for servicing

XR-12000A Alignment

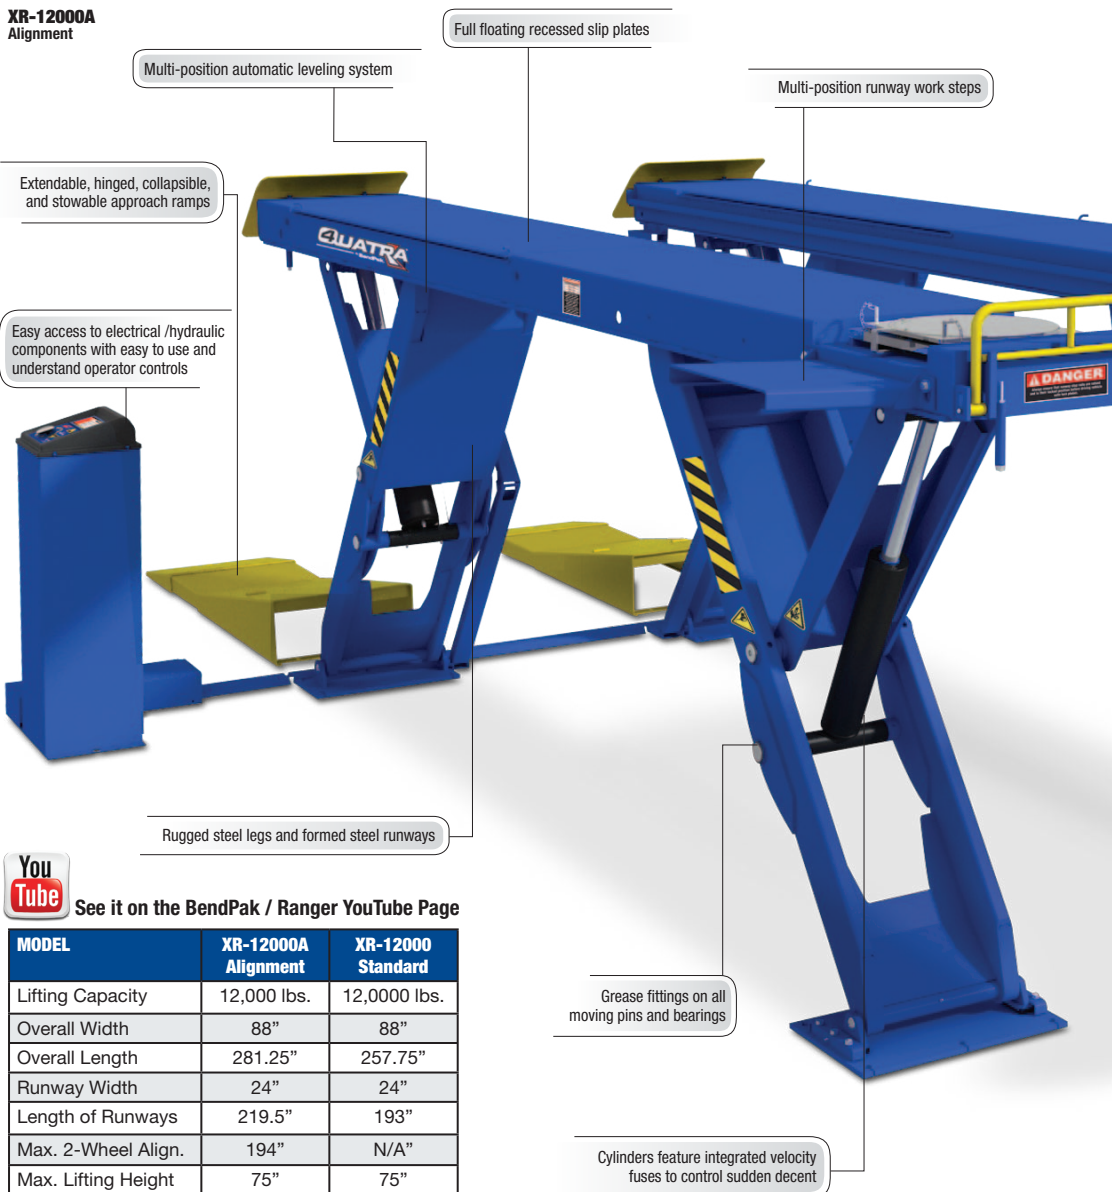


See it on the BendPak / Ranger YouTube Page

MODEL	XR-12000A Alignment	XR-12000 Standard
Lifting Capacity	12,000 lbs.	12,000 lbs.
Overall Width	88"	88"
Overall Length	281.25"	257.75"
Runway Width	24"	24"
Length of Runways	219.5"	193"
Max. 2-Wheel Align.	194"	N/A"
Max. Lifting Height	75"	75"

ACCESSORIES:




Rolling Bridge Jack



DP-30 Rolling Oil Drain




Air / Electric Work Station



Rolling Bridge Airline Kit



Optional RJ-6 6,000 lb. capacity rolling bridge jack

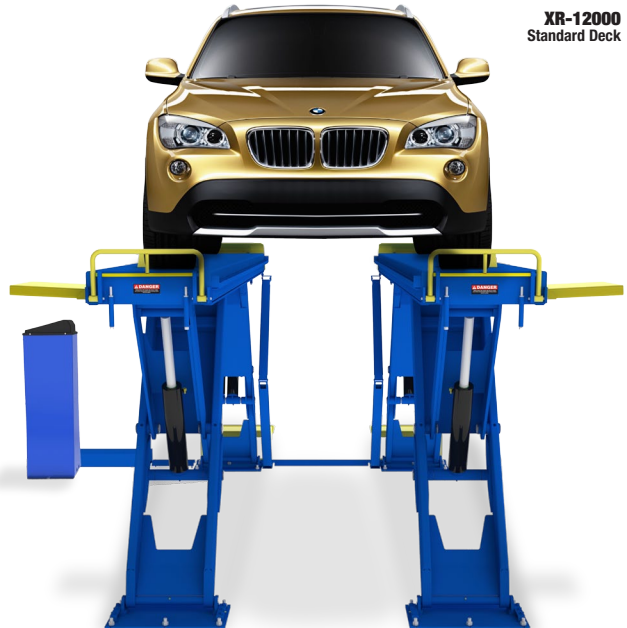

XR-12000
Standard Deck

Low-Rise & Mid-Rise

STANDARD FEATURES:



MD-6XP Model
Multi Piece Adapter Set



SP-7X & All Low-Rise Models
1.5 inch Rubber Lift Blocks



Portable Models
Mobile Power Cart

LR-5T
Low-Rise

Comes standard with 8 pc. adapter set

Lift Pad Dimensions - 24" x 53"
Capacity - 10,000 lbs.
Height Range - 4" - 22.75"

MD-6XP
Mid-Rise Portable

Adjustable Arms
Capacity - 6,000 lbs.
Height Range - 4.75" - 48"

MDS-6K
Mid-Rise Scissor

Comes standard with rubber lift blocks

Lift Pad Dimensions - 19" x 58"
Capacity - 6,000 lbs.
Height Range - 5" - 45.5" (48.5" with Blocks)

MD-6XP

Perfect for light-duty trucks and cars

Durable powder coat finish

Adjustable arm assemblies

Safety lock bar with multiple lock positions

Twin hydraulic cylinders

Solid steel torsion bar


Multi piece adapter set

Portable motor cart serves as tow handle

ACCESSORIES:




1.5" Rubber Lift Blocks



3" Rubber Lift Blocks



6" Rubber Lift Blocks



LR-4A Arm Kit



LR-60
Low-Rise

Comes standard
with rubber lift blocks

Lift Pad Dimensions - 18" x 52"
Capacity - 6,000 lbs.
Height Range - 4" - 26"



LR-60P
Low-Rise Portable

Comes standard
with rubber lift blocks

Lift Pad Dimensions - 18" x 53"
Capacity - 6,000 lbs.
Height Range - 4" - 26"



P-6B
Open Center Pit Lift

Comes standard
with rubber lift blocks

Lift Pad Dimensions - 18" x 53"
Capacity - 6,000 lbs.
Height Range - 4" - 26"



P-6FB
Open Center Pit Lift
Flush Mount

Comes standard
with rubber lift blocks

Lift Pad Dimensions - 18" x 53"
Capacity - 6,000 lbs.
Height Range - 4" - 26"



SP-7X
Full Rise

Comes standard
with rubber lift blocks

Lift Pad Dimensions - 21.5" x 63" - 70"
Capacity - 7,000 lbs.
Height Range - 5" - 68"



XR-12000
Full-Rise Open Center

Lifting Capacity - 12,000 lbs.
Max. Lift - 75" / Runway Length - 193"
Width - 88" / Length - 257.75"



P-6FB

Courtesy of Northwest Auto Salon



Parking & Storage

SERIES FEATURES:

Light-Duty

- Perfect for cars & light trucks
- Single hydraulic cylinder
- Dependable hydraulic design
- Easy operation & simple controls
- Electric / hydraulic power system
- Automatic safety locks

Heavy-Duty

- Wide base-plate for maximum stability
- Vehicle decks accommodate most passenger cars and light duty trucks.
- Heavy-duty steel construction
- Built-in wheel stops
- Two-position fail safe locking system



PLT-6S

Capacity - 6,000 lbs.
Rise - 62.9" / Deck Length - 135"
Width - 98.3" / Length - 153.5"



PL-7000XR

Capacity - 7,000 lbs.
Rise - 85" / Deck Length - 157.5"
Width - 98" / Length - 173.5"



HDS-35PX

Capacity - 35,000 lbs.
Rise - 168" / Deck Length - 398.5"
Width - 185.5" / Length - 456"



PL-14000

Capacity - 7,000 lbs. Per Deck
Overall Height - 280" / Deck Length - 155"
Width - 114" / Length - 193"



PL-14000XL

Capacity - 14,000 lbs. Per Deck
Overall Height - 280" / Deck Length - 173"
Width - 114" / Length - 215"



PL-18000

Capacity - 6,000 lbs. Per Deck
Overall Height - 364" / Deck Length - 155"
Width - 114" / Length - 189"



PLT-6S



PL-14000

GALLERY:



PL-7000XR



Minimum footprint allows multiple installations in limited space

- Overhead power unit provides smooth quiet hydraulic operation
- Power unit and controls integrated within the lift structure
- Automatic safety lock

Maintenance-free composite carriage bearings and self-lubricating chain rollers


Heavy-duty lifting chains

Wide deck platform accommodates pickups, vans, and cars

User-Friendly Controls

Wide-base plate mounts directly on ground or asphalt

Designed for installation on typical parking surfaces

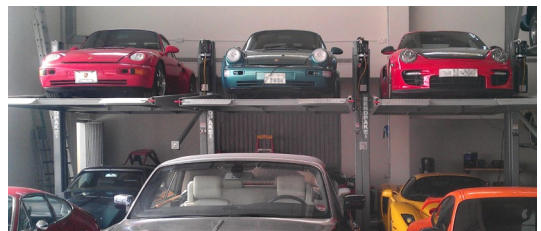

Rolling Bridge Jacks

SERIES FEATURES:

- 4,500 - 25,000 lbs. lifting capacity
- Versatile drop in lifting pads
- Multi-piece adapter set standard
- High-pressure hydraulic power unit
- Stackable adapters
- Automatic safety locks
- Three safety-lock positions
- Rubber lifting pads or steel lifting pads come standard or optional
- Optional air-line kit
- Raise 2 or 4 wheels off the runways
- Telescoping roller design allows the runways to be adjusted for different tread widths



**RJ-45
Rolling Jack**



Lifting Capacity - 4,500 lbs.
Lift Pad Reach - 41" - 60"
Frame Reach - 36" - 47"

**RJ-6
Rolling Jack**



Lifting Capacity - 6,000 lbs.
Lift Pad Reach - 41" - 60"
Frame Reach - 36" - 47"

**RJ-7
Rolling Jack**



Lifting Capacity - 7,000 lbs.
Lift Pad Reach - 41" - 60"
Frame Reach - 36" - 47"

**RJ-9
Rolling Jack**



Lifting Capacity - 9,000 lbs.
Lift Pad Reach - 42" - 61"
Frame Reach - 45" - 50"

**RJ-15
Rolling Jack**



Lifting Capacity - 15,000 lbs.
Lift Pad Reach - 29" - 59"
Frame Reach - 46" - 59"

**RJ-18
Rolling Jack**



Lifting Capacity - 18,000 lbs.
Lift Pad Reach - 40" - 64"
Frame Reach - 45"

**RJ-25
Rolling Jack**



Lifting Capacity - 25,000 lbs.
Lift Pad Reach - 40" - 64"
Frame Reach - 45"



RJ-45

Portable Column Lift

SERIES FEATURES:

- 18,000-lb. individual column capacity
- 108,000-lb. maximum system capacity
- SINGLE, PAIR or TEAM operation
- Three 30' cables are used leaving the front or back of the lift clear of cables
- Self-diagnostics and self-calibration
- Control systems feature 24-volt circuitry
- Variable height limit settings
- Two-speed lowering option settings
- Equipped with a warning light and audible alarm for critical warning alerts
- Emergency shut off's on each column
- Key lock enclosure on each column
- Electronics are multi-fuse protected
- Enclosed electric-hydraulic power system
- Pallet-jack style steering wheels
- Extended forks accommodate wide tires and deep wheel configurations
- Multi-width wheel forks with locking pins
- Tandem 8" diameter polyurethane covered steel wheels

PCL-18

- SINGLE, PAIR or TEAM operation
- Rabbit or Turtle lowering speeds
- Multi-fuse protected

Warning light and audible alarm

Emergency shutoffs on each column

Multiple, automatic, independent safety locks spaced every 4 inches


30 ft. cables

Multi-width wheel forks with locking pins

Durable powder-coat finish

Easily roll over dirt and debris

Pallet-jack style steering wheels

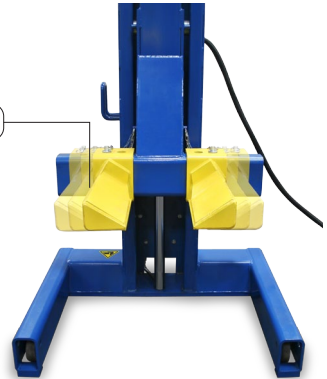

*Can be configured in sets of 4 or 6

PCL-18



Column Capacity - 18,000 lbs.
System Capacity - 108,000 lbs.
Lifting Height - 71.5"

Pipe Benders

SERIES FEATURES:

- 3-1/2" Min. bending radius
- 5" Max. bending radius
- Canister style hydraulic filter
- 5 Hp / 208 - 230 VAC motor
- Manual or automatic controls
- Drop-in swaging collars
- Twist lock tooling
- ANSI 92.2 Cylinders
- Quick release bending dies
- Bending heads to within .002"
- Bending and end finishing operation
- Adjustable back gate pressure
- 180° bending capacity
- One piece solid steel barrel
- Direct drive high speed 4 GPM pump
- Tool trays
- Large fluid reservoir
- Filtered hydraulic system
- Oil sight gauges
- 1/2" high pressure hose
- Wide variety of tooling available

BB-1



Bending Controls - Manual
Clampless Swager - Internal Expander
BB-1 Die Package Available

1302BA-202 1302BA-302



Bending Controls - Digital Automatic
Clampless Swager - Internal Expander
202 or 302 Die Package Available

1502BA-202 1502BA-302



Bending Controls - Digital Automatic
Clampless Swager - Internal Expander
202 or 302 Die Package Available

BB-2



Bending Controls - Manual
Clampless Swager - Internal Expander
BB-2 Die Package Available

1302BAS-202 1302BAS-302



Bending Controls - Semi-Automatic
Clampless Swager - Internal Expander
202 or 302 Die Package Available


1502BAS-202 1502BAS-302



Bending Controls - Semi-Automatic
Clampless Swager - Internal Expander
202 or 302 Die Package Available



BB-1 / 202 DIE PACKAGE



BB-1 / 202 Economy Die Package
Bending and End Forming Tooling
Sizes - 1-1/2" - 1-3/4" - 2" - 2-1/4" - 2-1/2"

BB-2 / 302 DIE PACKAGE



BB-2 / 302 Economy Die Package
Bending and End Forming Tooling
Sizes - 1-1/2" - 1-3/4" - 1-7/8" - 2" - 2-1/4" - 2-1/2"


ACCESSORIES:



Specialty Tooling
Available Upon Request



300-1 Die Package



300-2 Die Package




Card System CD



Rotation Dial




BB Series / 1302 Series
Top View

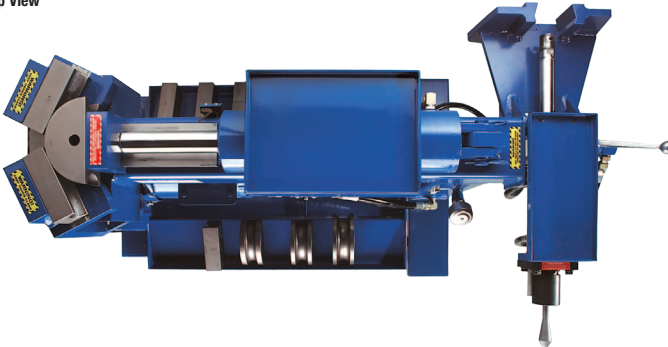

BAS Semi-Automatic Controls

1502 Series
Top View

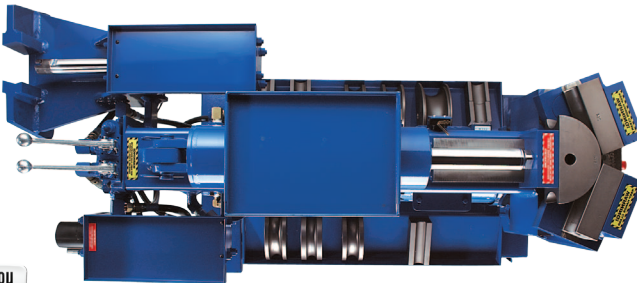

BA Digital Automatic Controls



See it on the BendPak / Ranger YouTube Page


Air Compressors

SERIES FEATURES:

- 80-Gallon vertical tank
- 3-Cylinder / 2-stage pump
- ASME rated tank
- Siemens™ electric mag-starter
- Fan-type flywheel
- Fully-enclosed belt guard
- Oversized roller bearings
- Forged ductile iron crankshaft
- Forged aluminum alloy pistons and connecting rods
- 100% cast iron block
- Cast iron cylinders and heads with deep cooling fins
- Forced-air after cooler
- Oil sight gauge
- Automatic pressure switch
- ASME rated overload pressure safety valve
- Pressure gauge with valve
- Oversized replaceable air filters
- Automatic start / stop

5 HP MODELS

7.5 HP MODELS



Pump cutaway

The 100% cast-iron TRI-MAX™ Series pump features simple splash lubrication for total reliability and a “W-3” finned cylinder configuration that provides 360° cooling. Lower RPM's and large-diameter finned copper tubing between stages, means they will run cooler, which ultimately achieves maximum compressor efficiency with less moisture contamination.

LS580V-601 / 208-230 V / 60 Hz / 1 Ph
LS580V-603 / 208-460 V / 50-60 Hz / 3 Ph
 Horsepower - 5 Hp
 Maximum CFM - 22.8 / 175 psi

LS7580V-601 / 208-230 V / 60 Hz / 1 Ph
LS7580V-603 / 208-460 V / 50-60 Hz / 3 Ph
 Horsepower - 7.5 Hp
 Maximum CFM - 28.5 / 175 psi


Large “Finned” copper tubing helps keeps air cool between stages and to tank

Cast iron heads

Oversized balanced flywheel features large fan blades that forces cool air on the compressor pump

Deep cooling fins on the cast iron cylinders help maintain a lower operating temperature

Large mass-air filters

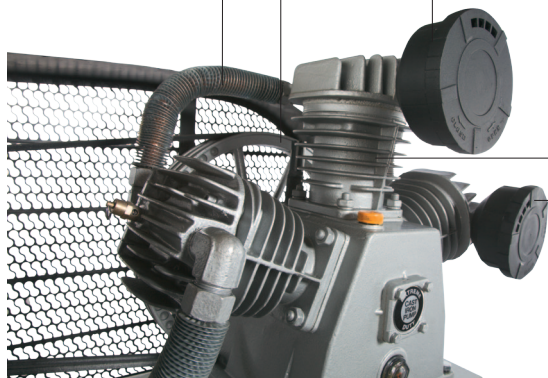

Tri-Max²
Extreme Duty
 Industrial-Grade Air Compressor

ACCESSORIES:



Moisture Minder®



Moisture Minder® Kit



Anti-Vibration Pads

**TriMax™ Reciprocating
Air Compressors**
HUSH/*Quiet.*



Power Units



Ranger™ AC hydraulic power-units are self-contained, dependable sources of hydraulic power that come standard with an abundance of features and benefits in a durable and economic package. These high quality power units are ideal for industrial AC applications such as auto lifts, man lifts, elevated work platforms, scissor lifts, dock levelers, conveyors, packaging machines, machine tools, compactors, crimping machines, presses, robotic equipment, tailgate lifts, dump bodies, cab tilts, emergency backup units, snowplows, log-splitters, harvesting machinery, lift platforms, scaffolds, presses, waste compactors, car lifts, medical field and dental field lifts, and more.

**E0.2B8F1
Power Unit**



Gal Reservoir - 1.6 / PRV - 1900
Motor - 1.5 HP / 110-230V-50/60-1PH
UL/ETL Listed

**E1.2B8F1
Power Unit**



Gal Reservoir - 1.6 / PRV - 2500
Motor - 1.5 HP / 110-230V-50/60-1PH
CE Listed

FEATURES:

- UL / ETL Listed (except model E1.2B8F1)
- Vertical Design
- Built-in throttle and buffer valves reduce pre-load pressure
- Integrated fixed-setting pressure relief valve
- Submerged pump
- Spare pressure port
- Multi-hole adapter plate adapts to a wide variety of mounting applications
- Suction-strainer
- Breather and fill-cap
- Hardened-allow pump end plates for unmatched durability in demanding environments and severe duty applications

**E2.1F3H1
Power Unit**



Gal Reservoir - 3.6 / PRV - 2650
Motor - 2.5 HP / 110-230V-50/60-1PH
UL/ETL Listed

**F2.1F3H1
Power Unit**



Gal Reservoir - 3.6 / PRV - 2850
Motor - 2.5 HP / 208-230V-50/60-1PH
UL/ETL Listed

**F3.2G3H1
Power Unit**



Gal Reservoir - 4.2 / PRV - 2650
Motor - 2.5 HP / 208-230V-50/60-1PH
UL/ETL Listed

**E3.7K3H2
Power Unit**



Gal Reservoir - 8.5 / PRV - 2400
Motor - 2.5 HP / 208-230V-50/60-1PH
UL/ETL Listed



QuickJack

QUICKJACK™ By Ranger Products

The QuickJack was developed specifically to address the shortcomings that have plagued the race circuit and DIY market for decades. Getting cars off the ground shouldn't be such a chore. Wasting time getting cars in the air means less time wrenching, and at the track seconds separate winners from losers. The QuickJack portable lifting system makes vehicle maintenance on the track and off convenient and lightning fast. The QuickJack can go anywhere and can be easily stowed in the trunk or back seat of most cars when not in use. Bring it to the track or drop it on your garage floor to perform routine maintenance in the comfort of your home, all in seconds. For more details visit www.quickjack.com. PATENT PENDING. All Rights Reserved.



BL-3500



See it on the BendPak / Ranger YouTube Page

Capacity - 3,500 lbs. / Pair
Height - 3" - 16.75" / Lifting time - 10 sec.
Individual Frame Weight - 45 lbs.



BL-5000



See it on the BendPak / Ranger YouTube Page


Capacity - 5,000 lbs. / Pair
Height - 3" - 18.5" / Lifting time - 15-30 secs.
Individual Frame Weight - 65 lbs.







QUICKJACK™ By Ranger Products

BL-3500 BL-5000

UPPER LOCK POSITION



LOWER LOCK POSITION



* Measurements for BL-3500
* Measurements for BL-5000

Includes:

- (2) Ea. 150" Hydraulic Hoses
- (2) Ea. 14" Aux. Hoses

- (2) Ea. Jack Frame Assemblies

- (1) Ea. Mini Hydraulic Power Unit
110V-AC Standard
Includes pendant control
(Optional 12V-DC available)

- (2) Ea. Quick-Mount Handles

- (4) Ea. 1.5" x 3" x 4" Rubber Blocks
- (4) Ea. 3" x 3" x 4" Rubber Blocks

Wheel Service

Ranger's NextGen™ Tire Changers - Tire Shop Tested™

NextGen™ SERIES

All NextGen models are loaded with design enhancements that make the technician's job easier. Sturdy frames, rigid 45mm hexagonal vertical shafts, and hardened-steel horizontal outrigger support arms eliminate flex during all tire service procedures reducing the chance of damage to expensive wheels. Bead seating and tire inflation is simple and effortless with Ranger's exclusive TurboBlast™ portable bead seating system. High-torque electric turntables, increased speed and reversible direction means quicker tire removal and installation. Industrial-grade pneumatic control valves feature die cast and machined bodies constructed from zinc and aluminum for increased service life and performance at the highest level possible within almost every imaginable working condition. Important wheel service accessories come standard like a large soap bucket with brush and a multi-piece plastic wheel protector kit that includes turntable jaw covers, bead-breaker blade boots and specialized mount / demount head covers to help protect delicate wheels.


**R745
Swing Arm**

Internal Clamping - 12" - 21"
External Clamping - 10" - 18"
Maximum Tire Diameter - 36"


**R76LT
Tilt-Back**

Internal Clamping - 10" - 30"
External Clamping - 9" - 28"
Maximum Tire Diameter - 43"


**R980AT/ATF
Swing-Arm
Power Assist**

Internal Clamping - 10" - 30"
External Clamping - 9" - 28"
Maximum Tire Diameter - 50"


**R980XR/XRF
Swing Arm**

Internal Clamping - 10" - 30"
External Clamping - 9" - 28"
Maximum Tire Diameter - 50"


**R980NXT/NXTF
Swing Arm
Power Assist**

Internal Clamping - 10" - 30"
External Clamping - 9" - 28"
Maximum Tire Diameter - 50"


**R76ATR/ATRF
Tilt-Back
Power Assist**

Internal Clamping - 10" - 30"
External Clamping - 9" - 28"
Maximum Tire Diameter - 43"


**R30XLT/XLTF
Swing Arm
Power Assist**

Internal Clamping - 12" - 32"
External Clamping - 11" - 30"
Maximum Tire Diameter - 50"


**R80DTXF
Leverless
Tire Changer**

Internal Clamping - 12" - 32"
External Clamping - 11" - 30"
Maximum Tire Diameter - 47"


**R26FLT
Truck Tire Changer**

Drive System - Electric / Hydraulic
Maximum Rim Diameter - 14" - 26"
Maximum Tire Diameter - 63"

ACCESSORIES:



Truck Cone Kit
RWS-1TC-1



Light & Medium Trucks
Adapter Set



Wheel Protector Kit
Comes Standard




Reduction /
Extension Clamps



RWL-150T Wheel Lift
Fits R980XR/NXT & R30XLT

R80DTXF Leverless Tire Changer

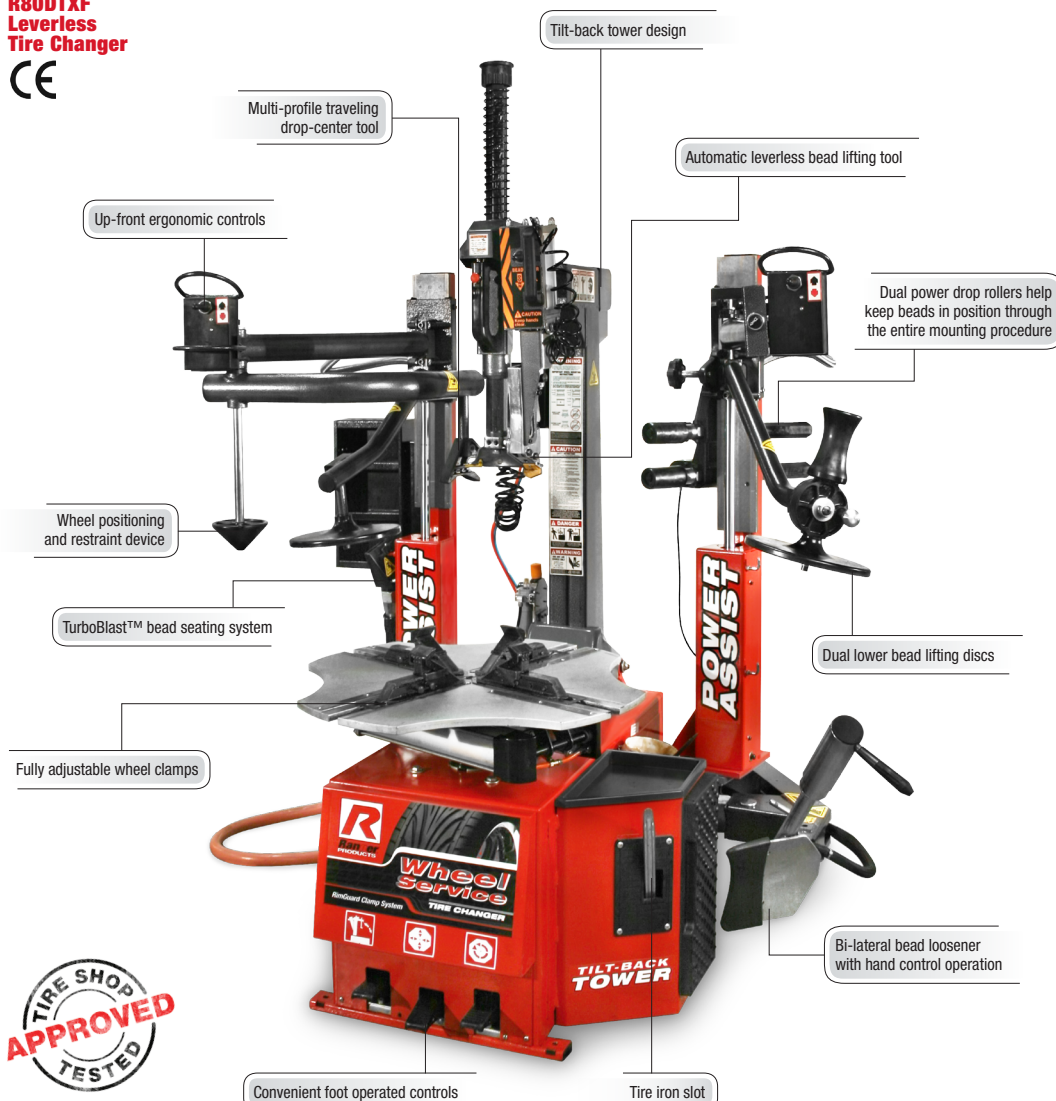

NextGen™ SERIES

See it on the BendPak / Ranger YouTube Page



Wheel Service


Optional Truck Adapter Kit

Our super-duty truck tooling package for Ranger brake lathes consists of an upgraded 1-7/8" arbor and a wide variety of adapters. This enormous set allows you to expand the coverage to handle virtually any vehicle through 1-ton trucks. Fits Ranger brake lathes with 1" arbor



RV-80L / H FEATURES:

- Simple, one-man operation
- Heats tread, shoulder and sidewall
- Cures the patches and inner tire lining
- Rotating adjustable frame
- Adjustable height tower
- Contoured inner and outer curing heads
- Available in low and high voltage

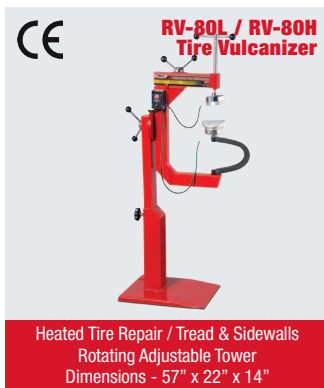

TS-150 FEATURES:

- Adjustable height tire spreader
- Air-powered
- Perfect for tire inspection and repair
- Heavy-duty rollers allow tires to rotate freely
- Heavy steel construction
- Wide-base design for stability
- Powder coat finish



RL-8500 / RL-8500XLT (not pictured) Combination Brake Lathe Package



See it on the BendPak / Ranger YouTube Page



DST-2420 FEATURES:

- Dynamic, Static, and Performance Alloy settings
- Automatic round-off with top-dead-center weight position indicator
- Hardened-steel 36-mm shaft
- Quick-release hub nut
- Multi-user save function

DST64T FEATURES:

- Precision DataWand™ and inner data arm
- Low RPM balancing speed and rapid six-second cycle time
- Automatic braking
- LED inner wheel target light
- Manual or automatic start
- Self calibration function

RB24T FEATURES:

- An ergonomic control board and easy-to-read LED display
- Highly precise 64-bit architecture
- Perfectly balanced vibration-free counter weighted flywheel belt drive
- Auto-stop function, electromagnetic pulse combined with pneumatic braking



DST-2420 Wheel Balancer



Max. Wheel Diameter - 10" - 30"
Max. Tire Diameter - 47"
Max. Tire Weight - 145 lbs.



DST-64T Wheel Balancer with DataWand™ Entry



Max. Wheel Diameter - 10" - 30"
Max. Tire Diameter - 50"
Max. Tire Weight - 150 lbs.



RB24T Truck Wheel Balancer



Max. Wheel Diameter - 30"
Max. Tire Diameter - 50"
Max. Tire Weight - 400 lbs.

CRT380R Wireless Wheel Aligner



Visual vehicle adjustment help



"Before" and "after" measurements can be printed

Superior screen graphics with vibrant animation

Technician has the option to customize units of measurement, accuracy, language, etc.

Self-centering wheel-clamp adapters

Customer information can be stored in the database, for quick reference of previous work orders

Cordless Bluetooth® sensors remove the hassle of connecting cables



Jacks & Lifting

INFORMATION:

Ranger's wide-array of multi-purpose floor jacks just keeps getting larger and more diverse. Our current line of floor jacks has maximum capacities ranging from 2,000 to 55,000 lbs. and come in a variety of styles like quick-pump and low-profile. No matter which one you choose, Ranger floor jacks offer incredible lifting power and top notch construction that you can count on to never let you down. Our impressive line of floor jacks is carefully designed to accommodate a wide spectrum of weight capacities and lifting applications, easily lifting just about anything that needs service.



RFJ-3000AL

Capacity - 3,000 lbs.
Height - 3.5" - 17.5"
Chassis Length - 24"



RFJ-3000LPF

Capacity - 3,000 lbs.
Height - 2.75" - 24"
Chassis Length - 34"



RFJ-4000AL

Capacity - 4,000 lbs.
Height - 3.5" - 17.75"
Chassis Length - 24"



RFJ-2TX

Capacity - 4,000 lbs.
Height - 3.5" - 31.5"
Chassis Length - 37"



RFJ-214T

Capacity - 4,500 lbs.
Height - 5" - 19.25"
Chassis Length - 26"



RFJ-3000LPF



RFJ-3TP

Capacity - 6,000 lbs.
Height - 5.25" - 19.25"
Chassis Length - 26"



RFJ-3TQP


Capacity - 6,000 lbs.
Height - 5" - 19.75"
Chassis Length - 25.5"



RFJ-6HD

Capacity - 6,000 lbs.
Height - 3.625" - 21"
Chassis Length - 27"

GALLERY:



RFJ-3T



Capacity - 6,000 lbs.
Height - 4.75" - 20.5"
Chassis Length - 28"



RFJ-10TL



Capacity - 20,000 lbs.
Height - 7" - 23"
Chassis Length - 61"



RBJ-25TL



Capacity 1st Stage - 55,000 lbs.
Capacity 2nd Stage - 20,000 lbs.
Height - 7.125" - 14.75" / Chassis Length - 30"



RTJ-1100



Capacity - 1,100 lbs.
Height - 45" - 72"
Base - 24" x 24"



RTJ-1



Capacity 1st Stage - 2,000 lbs.
Capacity 2nd Stage - 1,000 lbs.
Height - 37" - 73" / Base - 39" x 39"

The original
TransJack



RTJ-3000



Capacity 1st Stage - 3,000 lbs.
Capacity 2nd Stage - 2,000 lbs.
Height - 37" - 79.5" / Base - 45" x 45"



RFJ-4000AL

Jacks & Lifting

SERIES FEATURES:


- Welded steel construction for maximum durability
- Safety ratchet design assures stands remain locked under load
- Perfect for holding drive-train or exhaust components in position
- Sold in pairs
- Quick adjust spin handle with thrust bearing
- Wide base provides maximum stability
- Thick, rubber adjustable pad for maximum support
- Convenient handle and column release
- Hardened ACME screw for easy adjustment
- Tripod design evenly distributes weight
- Pneumatic operated wheel lift
- One-handed, lever controlled
- Heavy-duty steel casters
- Bearing mounted slider
- Stabilizes vehicles raised on lifts
- Heavy-steel construction for maximum durability




Motorcycle Lifts

SERIES FEATURES:

- Constructed out of 12-gauge steel
- Pneumatic lifting cylinder
- Durable powder-coat finish
- Adjustable front wheel vise
- Drop-away rear wheel deck
- Easy ramp(s) removal
- Front and side extensions standard
- Built-in retractable swivel casters
- Full travel automatic safety locks
- Single hydraulic lifting cylinder
- Side decks can be easily removed
- Diamond-plate approach ramps
- Air or hydraulic pump operation
- Multiple locking positions

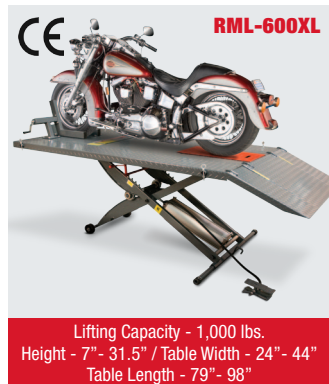

RML-1500XL Super Stretch

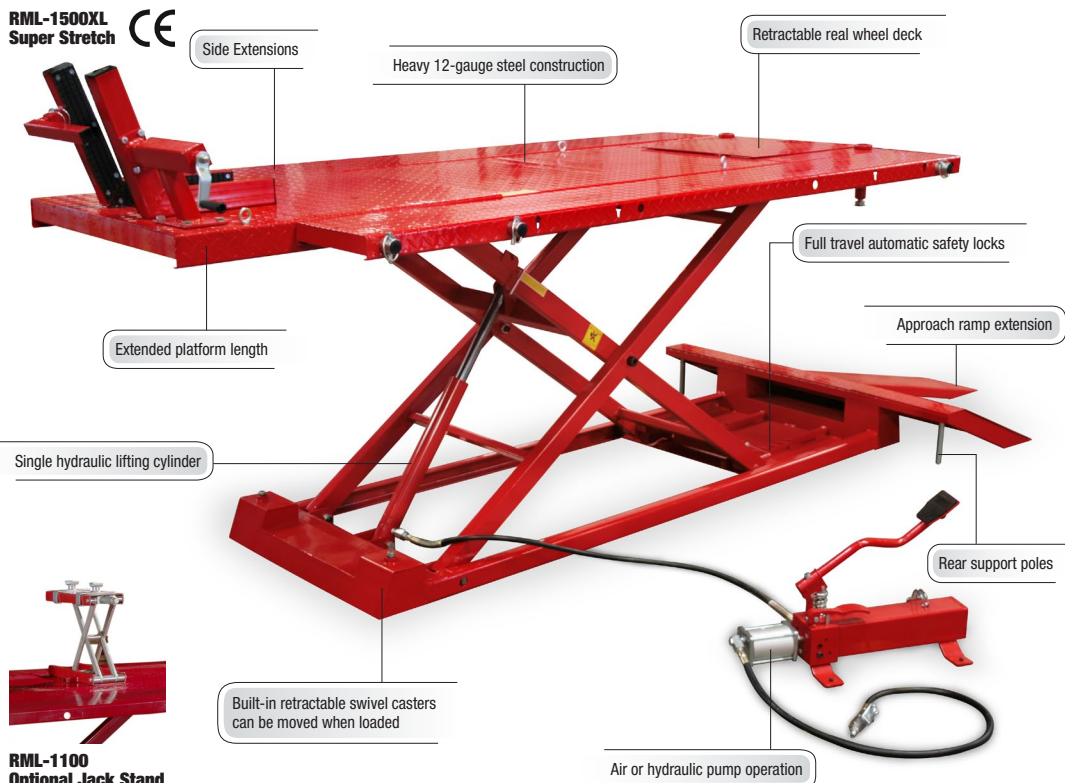

Tool Storage & Benches

INFORMATION:

Ranger Toolboxes and tool chests are gaining popularity by the day in automotive shops and private garages. That's because our tool storage solutions are built to the strictest specifications, featuring high-grade 16 and 18-gauge steel construction, durable internal cages, high-quality welds, all the best drawer hardware and a masterful cherry-red powder coat finish that looks better than any stock paint job on the market—and it'll last forever to boot.

Without question, for your projects to get completed on time and to your satisfaction, you require a dedicated work area. So Ranger developed a line of large, heavy-gauge steel workbenches, specifically designed to handle the physical rigors of being in a busy garage or shop. We currently offer three sizes and styles to suit your needs and space restraints.



Number of Drawers - 7
Unit Dimensions - 29" x 40" x 18"
Mates with RTB-2D / RTB-9D / RTB-10D



Number of Drawers - 13
Unit Dimensions - 47.5" x 40" x 19"
Mates with RTB-8D / RTB-8DT



Number of Drawers - 2
Unit Dimensions - 26.25" x 10.5" x 12.25"
Mates with RTB-9D / RTB-7DC / RTB-10D



Number of Drawers - 8
Unit Dimensions - 41.5" x 19" x 18.5"
Mates with RTB-13DC



Number of Drawers - 8
Unit Dimensions - 41.5" x 19" x 18.5"
Mates with RTB-13DC



Number of Drawers - 9
Unit Dimensions - 26" x 17" x 12"
Mates with RTB-2D / RTB-7DC



Number of Drawers - 10
Unit Dimensions - 26" x 19" x 16"
Mates with RTB-2D / RTB-7DC



RWB-2D FEATURES:

- Electrostatic triple-baked protective powder coat
- Rolled edges for added strength and rigidity
- Full-extension ball bearing drawer slides
- Tumbler key-lock pivot drawer latching system

RWB-2S FEATURES:

- Glossy red finish
- Electrostatic oven-baked powder coat
- Rolled edges for added strength and rigidity
- 5/32" HD rolled edge steel table top
- 3/32" HD rolled edge steel shelves
- 12-gauge construction

RWB-1TD FEATURES:

- Lockable heavy-duty drawer
- 500-lb. working capacity
- Heavy-duty 4" casters
- Adjustable working height
- Removable polyethylene fluid drain
- 14-gauge table top
- 3/4" liquid containing rim



RTB-8D / RTB-13DC Shown as combo



Protective rubber mat

Heavy-gauge steel body

Brushed aluminum drawer handles

Electrostatic oven baked powder coat finish

Rolled edges for added strength and rigidity

Chrome side handles

Full-extension ball bearing drawer slides

2 heavy-duty fixed urethane casters and 2 heavy-duty swivel urethane casters with brake

Shop Equipment

INFORMATION:

Let Ranger Products lighten the load with our considerable line of high-quality rolling equipment. All Ranger Carts and Dollies are made from high-gauge steel and employ only the best casters for easy maneuvering. Our service carts, chassis-mount vehicle dollies, low-profile automobile carts and rolling adjustable work tables come fully equipped to make your day in the garage infinitely easier. Don't lift or carry—roll with Ranger!

Ranger's industrial shop presses offer you the versatility of professional-grade hydraulic force, whether you're at the shop or in your own garage. Among other operations, all Ranger Hydraulic Presses are ideal for the removal and installation of gears, bushings and bearings—so you can bend, straighten, flatten, crush, press, shape, push, pull, lift and spread like you were born doing it.



**RCD-1TD
Auto Carts**



Capacity - 1,000 lbs. (Each)
Dimensions - 15.5" x 23.5"
3.5" Cast Iron Ball Bearing Casters



**RCD-1V
Vehicle Dolly**



Lifting Capacity - 1,500 lbs.
Overall Height - 12"
Caster Size - 4.5"



**RP-10TP
Porta Power**



Capacity - 10 Tons / 20,000 lbs.
Stroke Ram - 6"
Hose Length - 6'



**RCD-1500
GoCart™
Vehicle Dolly**



Load Rating Each - 1,500 lbs.
Wheel Size Capacity - 8" - 24"
Tire Diameter Capacity - 15" - 28"



**GoCart™
Storage Rack**



Load Rating - 200 lbs.
Dimensions - 19" x 31" x 6"
Holds up to 4 GoCart™ Dollies



RP-20T



Capacity - 40,000 lbs.
Cylinder Stroke - 8"
Width - 23" / Height - 59"



RP-20HD



Capacity - 40,000 lbs.
Cylinder Stroke - 5.5"
Width - 37" / Height - 60.25"



Integrated 4" diameter
20-ton pressure gauge


Hydraulic cylinder moves laterally

Adjustable table height

RP-20HD

SERIES FEATURES:


- Wall, floor, or ceiling mount
- Use for air or water
- Powder coated for corrosion free performance
- Solid brass swivel fitting
- Guide arms adjusts to 9 positions
- 4-direction, non-snag rollers
- Multi-position release ratchet
- Anti-lock out ratchet mechanism prevents reel from locking up when hose is fully extended
- Reinforced mounting base
- Conveniently rewinds it without hassle
- Compact, space-saving design




Air Pressure - 300 psi
Hose Length - 33'
Fittings - 3/8"



Air Pressure - 300 psi
Hose Length - 50'
Fittings - 3/8"




Air Pressure - 300 psi
Hose Length - 50'
Fittings - 3/8"



Air Pressure - 2,250 psi
Hose Length - 50'
Fittings - 3/8"

RH-50PL

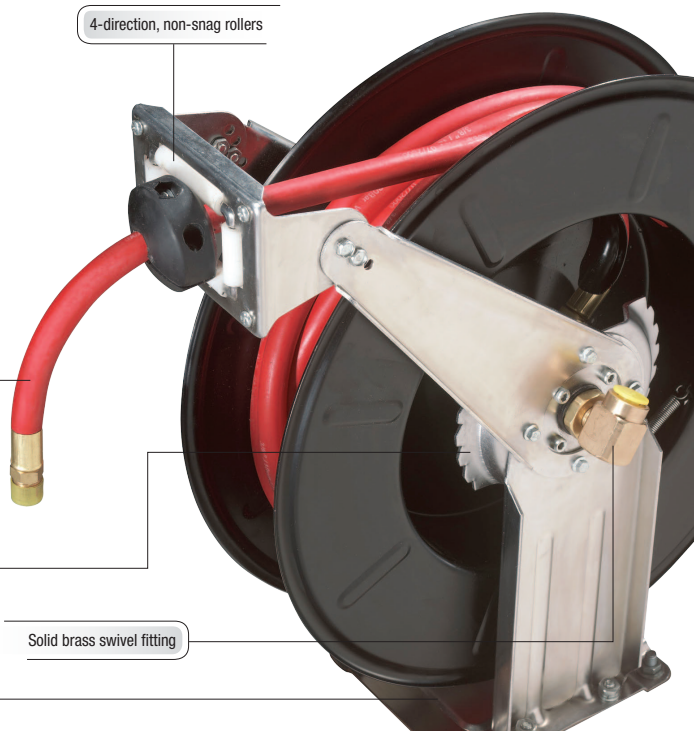

4-direction, non-snag rollers

Use for air or water

Anti-lock out ratchet mechanism prevents reel from locking up when hose is fully extended

Solid brass swivel fitting

Wall, floor, or ceiling mount with a 7" x 8" reinforced mounting base

Shop Equipment

SERIES FEATURES:

Oil Drains

- Lightweight for easy portability
- Safe and easy to use
- Non-corrosive telescoping tube
- Heavy-duty stainless steel clamp
- Built-in hand grips
- Durable steel construction

- Tough construction will resist dents, rust, and corrosion
- Rugged funnel with built-in contamination screen

Oil Filter Crushers

- Reduces cans up to 20%
- Reduces filters up to 25%

- Crushes cans in only 20 seconds
- 100% air operated
- Fulfills EPA and other mandated environmental standards
- Removes up to 95% of the oil
- Compact floor or bench-mount design
- All-steel industrial construction



RD-8G Capacity - 8 gal.
Height - 47" - 63"
Funnel Diameter - 17"

RD-18G Capacity - 18 gal.
Height - 48" - 72"
Evacuation Pump



RD-15 Capacity - 15 gal.
Height - 8.5"
Shipping Weight - 52 lbs.



RD-20SE Capacity - 20 gal.
Height - 52" - 83"
Funnel Diameter - 16"



RD-20FCS Capacity - 230 lbs.
Unit Weight - 72 lbs.
Dimensions - 27.75" x 42" x 17.75"



RP-6KC Capacity - 3 Ton / Cycle Time - 15 - 20 sec.
Air Requirements - 140 - 160 psi
Dimensions - 15" x 37" x 14"



RP-20FC Capacity - 10 Ton / Cycle Time - 15 - 20 sec.
Air Requirements - 125 - 175 psi
Dimensions - 17" x 29.5" x 17"



RS-500 / RS-750 FEATURES:

- Heavy-duty steel construction
- Removable tank screen
- Stainless oil skimmer
- Removable parts tree
- Powder coat finish
- Brass nozzles
- Full opening octagonal door
- Large drain pipe
- Heavy-duty rubber casters
- Friction-drive turntable system
- Gasket-free door
- Small parts basket
- Stainless steel handles
- Free bucket of soap included

SOAP FEATURES:

- Non-foaming soap
- Low pH
- Mild alkali
- Water soluble
- Specially formulated
- Removes grease, oil, stains, carbon, protein, and some paints



**RS-500
Spray
Wash
Cabinet**

Load Capacity - 500 lbs.
Tank Capacity - 50 gal.
Interior Dimensions - 43" x 32"



**RS-750
Spray
Wash
Cabinet
(Truck)**

Load Capacity - 1,000 lbs.
Tank Capacity - 53 gal.
Interior Dimensions - 32" x 54"

SOAP 20 LBS. / 50 LBS.



Low pH
Water soluble
Non foaming soap

RS-750



Removable tank screen and parts tree

Automatic timer and
safety door switch

Quick release door latch

Friction-drive turntable system

Stainless oil skimming system

Built-in tank drain

Heavy-duty rubber casters



See it on the BendPak / Ranger YouTube Page

Shop Equipment

SERIES FEATURES:

Bubble Balancer


- Rugged die-cast aluminum head cone
- Easy to use self-leveling stand
- Built-in weight-storage compartments
- Self-aligning, spring-loaded cone
- Hardened cast pivot seat
- Recessed circular level bubble

Rolling Creeper/Work Seat

- Padded center cushion and headrest
- Swivel casters for easy maneuverability
- Relieves sore back muscles
- Work more efficiently
- Sturdy steel tubing construction
- Low profile design

Tire Changers

- Rubber grip handles
- Perfect for home or shop use
- Portable and easy-to-use
- Heavy steel construction
- Self-leveling stand
- Efficient operation at a fraction of cost

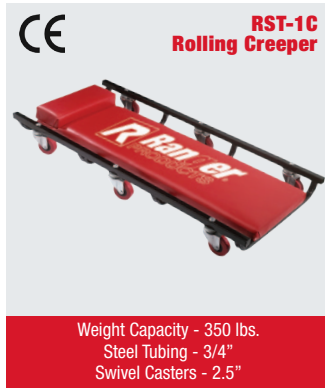

RST-500ES / RST-500ESD:

- Adjusts to fit all vehicles
- Rubber foot pads to hold load securely
- Straddles inner fender wells
- Precisely positions engine for easy gear box and transmission removal
- Perfect for 4 and 6 cylinder engines
- 1,100 lb. & 1,500 lb. capacity

RES-1TF FEATURES:

- Folds upright to conserve space
- Heavy steel construction
- Long rubber-grip handle
- Head swivels 360° for easy positioning
- Heavy-duty swivel casters
- Slotted adjustable saddle permits
- Neck is reinforced for extra strength

RSC-2TF FEATURES:

- Designed for shops with limited space
- Folds for easy storage
- Heavy-duty steel casters
- Neck is reinforced for extra strength
- Wide base for maximum stability
- Telescoping boom provides 4 positions
- Heavy steel construction



RST-500ES Engine Support



Holding Capacity - 1,500 lbs.
Screw Travel - 13"
Adjustable Width - 40" - 63"



RES-1TF Engine Stand



Holding Capacity - 2,000 lbs.
Front Width - 31" / Rear Width - 27.5"
Height - 37.5" / Length - 41"



RSC-2TF Folding Shop Crane



Boom Length - 40" - 63"
Boom Capacity - 1,100 - 4,400 lbs.
Boom Height - 80" - 93"




RST-500ESD Engine Support



Holding Capacity - 1,100 lbs.
Screw Travel - 18.75"
Adjustable Width - 26.5" - 49.5"


RES-1TF

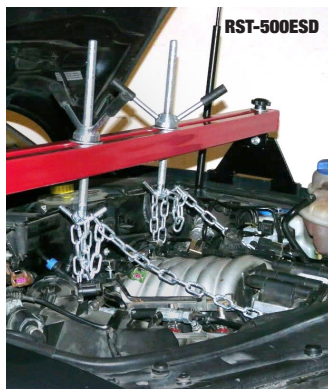

Manufacturing Superiority

BendPak recognizes the manufacturing process as our moment of maximum influence. When we ship a piece of equipment, we need to know that the product that left our manufacturing complex was the best it could be. That's why we demand nothing short of the very finest in facilities and machinery. Our primary factory houses development and manufacturing for medium and heavy-duty lifting products and wheel service models. At just over 300,000 square foot it's a facility designed for maximum efficiency and safety, where we employ the best steel fabrication techniques in the world.

Main Production Facility

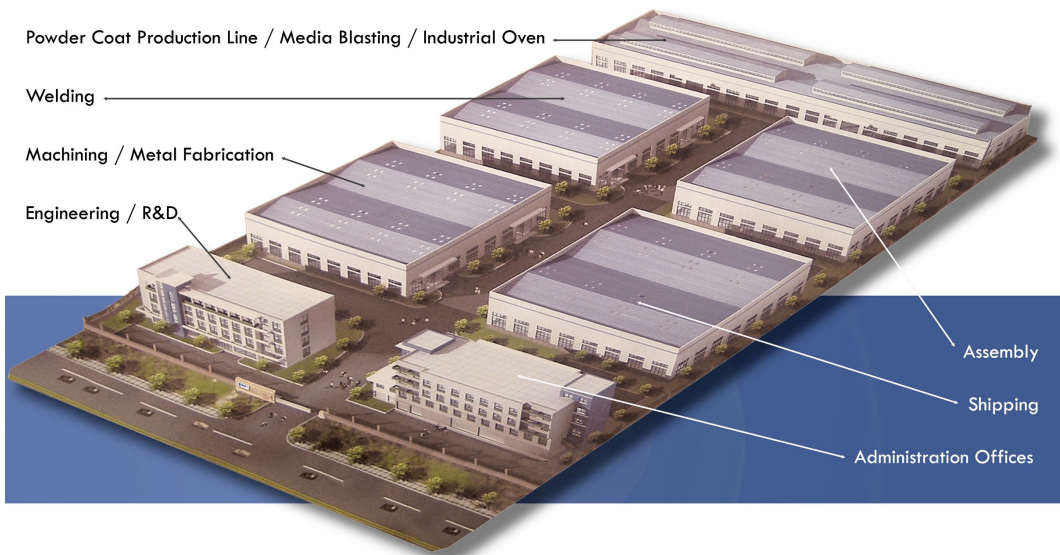

MEDIUM AND HEAVY-DUTY PRODUCTS

BendPak's second mega-sized manufacturing is used primarily for manufacturing light and medium duty lift products, select parking systems, and select vehicle repair tools and equipment. The multiplex factory houses state-of-the-art equipment including numerically-controlled turning and milling equipment, automated welding systems and full-capability services like comprehensive metallurgy testing, heat treatment, automated powder coating, and other specialty operations. The facility also houses assembly and packaging operation centers and product development testing labs for BendPak's growing customer base around the globe.



LIGHT AND MEDIUM-DUTY LIFT PRODUCTS

Our multi-department manufacturing complexes have allowed us to expand machinery and employees and triple our daily production capacity. All BendPak employees are Q.C. trained and follow rigid ISO-9001 guidelines. Every day, more than 700 employees around the world dedicate themselves to putting our core values into action. Safety is first—it's our company's top priority, followed closely by environmental responsibility, cost-efficiency, quality, customer service and accountability for all departments. These principles guide our highly skilled workforce towards BendPak's unified vision.

Across the globe, BendPak's facilities encompass over 600,000 square feet in total and consist of vertically integrated manufacturing, operations and logistics facilities. Each location follows strict guidelines as outlined by ISO-9000, further supporting our position as a premier global manufacturer. At BendPak, we ensure that our offshore manufacturing is no different in approach, standards, quality, inspection or packaging from our domestic production. These facilities are audited year round and undergo systematic evaluation of documented quality programs such as TUV, ANSI/ALI ALCTV, CSA, UL and AS/NZS 1418.9. The programs themselves are audited quarterly, regardless of the facility location, to ensure continued compliance with all applicable standards.



BendPak, Ranger Products and BendPak / Ranger related marks are trademarks and/or registered trademarks of BendPak Inc.



Inquire about these certification listings.



1645 Lemonwood Drive • Santa Paula, CA USA 93060

Tel: 1-805-933-9970 • Fax: 1-805-933-9160 • www.bendpak.com