




The Benchmark of Quality™



R Ranger
PRODUCTS

BP BendPak

This is my BendPak



Bill Goldberg

There are many, but this one's mine.

"If you're going to put your wheels through hell, be sure you've got the rock-solid muscle to bring them back to life. BendPak lifts are built as ruthless as the road itself. Never compromise."

– Bill Goldberg, Professional Athlete & TV Host

 @Goldberg

SCAN TO WATCH
THE VIDEO NOW



Table of Contents

4-5	Medium-Duty Clear Floor Lifts
6-7	Medium-Heavy Floor Plate Lifts
8-9	Heavy-Duty Clear Floor Lifts
10-11	4-Post Light-Duty Lifts
12-13	4-Post Standard Lifts
14-15	4-Post Heavy-Duty Lifts
16-17	Alignment Lifts
18	This is my BendPak
19	Image Gallery
20-21	Quatra Scissors
22-23	Scissors & Low-Mid Rise
24-25	Parking & Storage
26	Rolling Bridge Jacks
27	Portable Column Lift
28-29	Pipe Benders
30-31	Air Compressors
32	RX3040 Touchless Tire Changer
33	Image Gallery
34-35	Tire Changers
36	Tire Repair / Brake Lathes
37	Wheel Balancers / Wheel Aligner / Wheel Lift
38-39	Floor Jacks / Transmission Jacks
40	Jacks Stands
41	Motorcycle Lifts
42	Tool Storage
43	Work Benches
44	Carts & Dollies
45	Hose Reels
46	Oil Drains / Oil Filter Crushers
47	Parts Washer
48	Small Material Bender / Rolling Creeper / Work Seat / Tire Changers
49	Engine Support / Engine Stand / Shop Crane
50-51	Manufacturing Superiority



Medium-Duty Clear Floor

SERIES FEATURES:

- Wide or narrow configuration
- Exclusive "Tru-Metric" arms
- Single-point safety release
- Dual "Direct-Drive" cylinders
- Electric / hydraulic power
- 17" x 19" A36 steel base plate
- UHMW polyethylene bearings
- Dual 3"- spaced safety locks
- Automatic arm restraints
- Heavy-duty aircraft cable
- Oversized sheave diameter
- Padded safety-shutoff bar
- 8-piece truck and van adapters
- Triple-telescoping / low-pro arms
- Contact pads
- Stackable adapters
- Single piece columns
- Triple-telescoping arms
- Accommodates a wide variety of vehicles assemblies
- Safety locks in each column



**XPR-7TR
Turf Lift**

Lifting Capacity - 7,000 lbs.
Max. Lift - 73"
Width - 145" / Height - 145"



**XPR-10
Clear Floor**

Lifting Capacity - 10,000 lbs.
Max. Lift - 73"
Width - 132" or 145" / Height - 145"



**XPR-10A
Asymmetric**

Lifting Capacity - 10,000 lbs.
Max. Lift - 73"
Width - 132" or 145" / Height - 145"



XPR-10A Arms shown with optional foot guards



**XPR-10-168
Clear Floor Extended Height
XPR-10A-168
Asymmetric Extended Height**

Features bolt-on top
extension for added
24" clearance

ACCESSORIES:



Steel Lift Pads



Frame Cradle Pads




Offset Adapters




Air / Electric Work Station

XPR-10A

Shown with air / electric work station and foot guards



FREE truck and van adapters come standard with all BendPak 2-post lifts

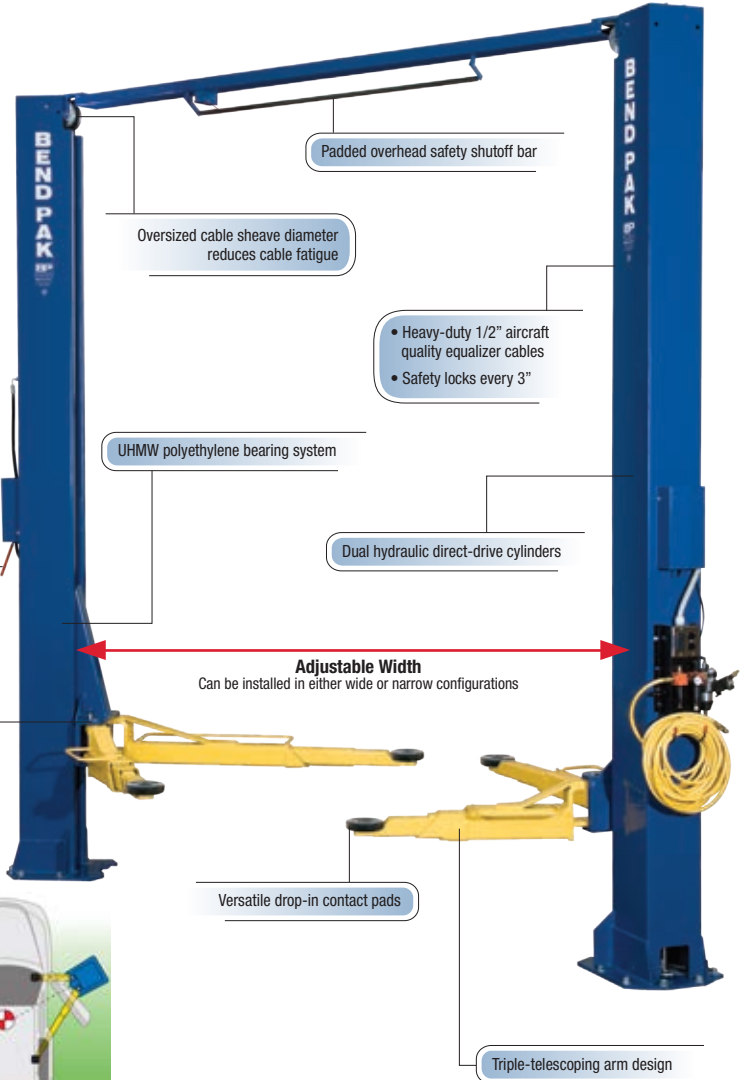

Medium-Heavy Floor Plate

SERIES FEATURES:

- Adjustable width design
- Dual hydraulic lifting cylinders
- Single-piece columns
- Single point safety release
- Drop-end arms
- Triple-telescoping arms
- Electric / hydraulic system
- UHMW polyethylene bearings
- Dual 3"- spaced safety locks
- Automatic arm restraints
- 8-piece truck and van adapter
- Adjustable wide or narrow drive-thru configurations
- Versatile drop in contact pads
- Durable powder coat finish
- Open top design
- Large steel base plates
- Heavy-duty 3/8" equalizer cables
- Rugged steel construction

XPR-7TRF
Floor Plate Turf Lift



Lifting Capacity - 7,000 lbs.
Max. Lift - 73"
Width - 145" / Height - 145"

XPR-9
Shorty Floor Plate



Lifting Capacity - 9,000 lbs.
Max. Lift - 76"
Width - 132" or 145" / Height - 113"

XPR-9D
Direct-Drive Floor Plate



Lifting Capacity - 9,000 lbs.
Max. Lift - 73"
Width - 132" or 145" / Height - 145"


XPR-12FD
Heavy-Duty Floor Plate



Lifting Capacity - 12,000 lbs.
Max. Lift - 74"
Width - 155" / Height - 144"



Arms shown with optional foot guards



FREE truck and van adapters come standard with all BendPak 2-post lifts

ACCESSORIES:



Steel Lift Pads



Frame Cradle Pads



Offset Adapters



Air / Electric Work Station

XPR-9D

Shown with air / electric work station and foot guards



- Heavy-duty dual 3/8" equalizer cables
- Safety locks every 3"

Oversized cable sheave diameter reduces cable fatigue

Dual hydraulic direct-drive cylinders

Single point safety release

UHMW polyethylene bearing system

Automatic arm restraints

Versatile drop-in contact pads

Low profile floor plate

Triple-telescoping arm design

Heavy-Duty Clear Floor

SERIES FEATURES:

- Dual-synchro equalization system
- Electric / hydraulic power system
- UHMW polyethylene bearings
- Single-piece columns
- Dual "Direct-Drive" cylinders
- Single point safety release
- Automatic arm restraints
- 8-piece truck and van adapters
- Oversized column base plates
- Padded safety-shutoff bar
- Safety locks in each column
- Heavy-duty 1/2" equalizer cables
- Versatile drop in contact pads with convenient storage
- Triple-telescoping arms / XPR-12C
- Powder coat finish
- Rubber door bumpers
- Oversized base plates



XPR-12C

Lifting Capacity - 12,000 lbs.
Max. Lift - 74"
Width - 155" / Height - 170"



XPR-15C

Lifting Capacity - 15,000 lbs.
Max. Lift - 74"
Width - 155" / Height - 170"



XPR-18C

Lifting Capacity - 18,000 lbs.
Max. Lift - 74"
Width - 155" / Height - 170"



ACCESSORIES:



Frame Cradle Pads



Mobile High-Lift Jack Stand



Steel Lift Pads



Air / Electric Work Station



XPR-12C-192
XPR-15C-192
XPR-18C-192
 Features bolt on top extension for added 24" clearance



Padded overhead safety shutoff bar

Oversized cable sheave diameter reduces cable fatigue

- Heavy-duty 1/2" aircraft-quality equalizer cables
- Safety locks every 3"

Automatic arm restraints

UHMW polyethylene bearing system


Durable rubber lift pads

Dual hydraulic direct-drive cylinders

Adapter storage

Oversized A36 steel base plates

Single point safety release



FREE truck and van adapters come standard with all BendPak 2-post lifts

4-Post Light-Duty

SERIES FEATURES:

- Runways feature non-skid surface
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features 1-1/4" sheave axles
- Features heavy-duty 3/8" aircraft cable
- Internal "anti-sway" slider blocks in each column
- Electric / hydraulic power system
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive through ramps option available
- 36" approach ramps available
- Durable powder coat finish
- Rugged steel construction

**HD-7P
Narrow**



Lifting Capacity - 7,000 lbs.
Max. Lift - 82" / Runway Length - 164"
Width - 100" / Length - 189"

**HD-7W
Wide**



Lifting Capacity - 7,000 lbs.
Max. Lift - 82" / Runway Length - 164"
Width - 117" / Length - 189"

**HD-7PXW
Super Tall**



Lifting Capacity - 7,000 lbs.
Max. Lift - 140" / Runway Length - 188"
Width - 117" / Length - 224"

HD-9



**HD-7500BL
Boat Storage**



Lifting Capacity - 7,500 lbs.
Max. Lift - 70" / Runway Length - 164"
Width - 132" / Length - 200"

HD-7500BL



**HD-7500BLX
Boat Storage**



Lifting Capacity - 7,500 lbs.
Max. Lift - 82" / Runway Length - 188"
Width - 132" / Length - 224"

ACCESSORIES:




Jack Platform



Air / Electric Work Station



RJ-45 Rolling Bridge Jack




Aluminum Deck



Drip Trays

HD-7PXW

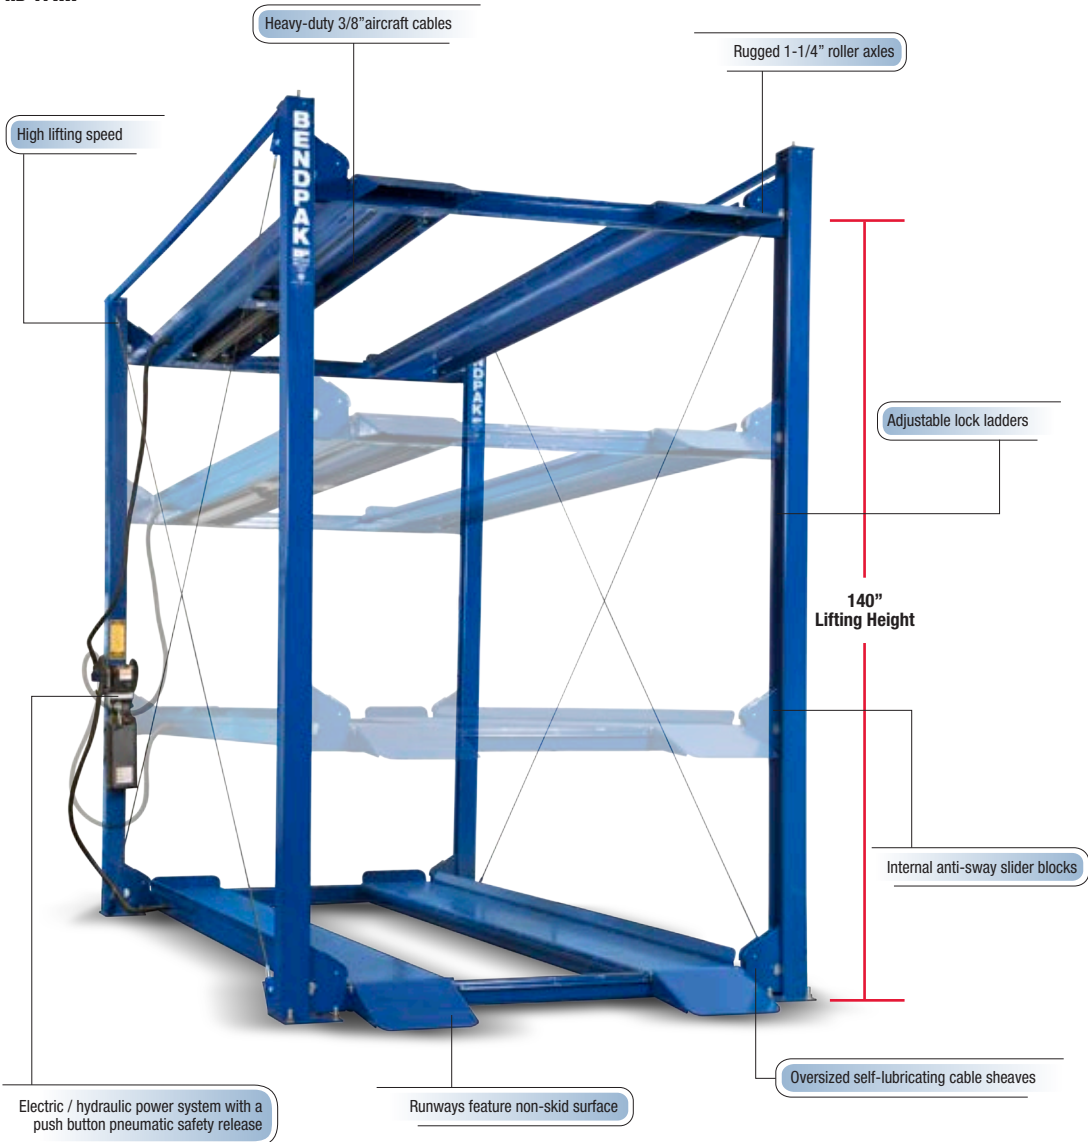

4-Post Standard

SERIES FEATURES:

- Freestanding or bolt-down design
- Runways feature non-skid surface
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features 1-1/4" sheave axles
- Internal "anti-sway" slider blocks in each column
- Features heavy-duty 3/8" aircraft cable
- Longer ramps for low ground clearance vehicles
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive through ramps option available
- 36" approach ramps available



**HD-9
Wide Standard**



Lifting Capacity - 9,000 lbs.
Max. Lift - 70" / Runway Length - 164"
Width - 117" / Length - 200"



**HD-9ST
Narrow Standard**



Lifting Capacity - 9,000 lbs.
Max. Lift - 70" / Runway Length - 164"
Width - 100" / Length - 200"



**HD-9STX
Narrow Tall Long**



Lifting Capacity - 9,000 lbs.
Max. Lift - 82" / Runway Length - 188"
Width - 100" / Length - 224"



**HD-9XW
Wide Tall Long**




Lifting Capacity - 9,000 lbs.
Max. Lift - 82" / Runway Length - 188"
Width - 117" / Length - 224"



**HD-9XL
Wide Standard Long**



Lifting Capacity - 9,000 lbs.
Max. Lift - 70" / Runway Length - 188"
Width - 117" / Length - 224"

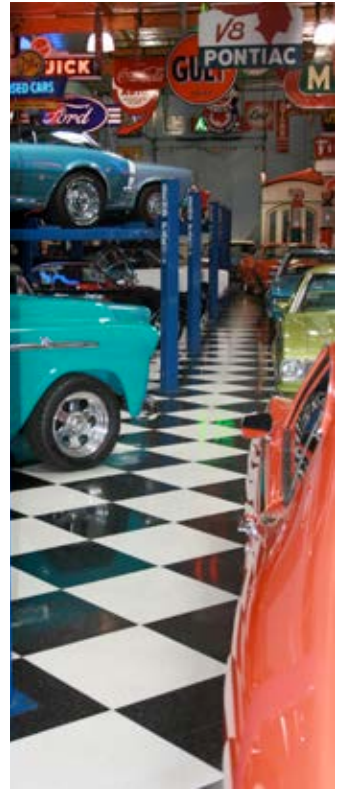

ACCESSORIES:




Jack Platform



Air / Electric Work Station



RJ-45 Rolling Bridge Jack



Aluminum Deck



Drip Trays

**HD-9SW
Double Wide Standard**



Lifting Capacity - 9,000 lbs.
Max. Lift - 70" / Runway Length - 164"
Width - 206" / Length - 200"


**HD-9SWX
Double Wide Tall Long**



Lifting Capacity - 9,000 lbs.
Max. Lift - 82" / Runway Length - 188"
Width - 206" / Length - 224"



HD-9 Series

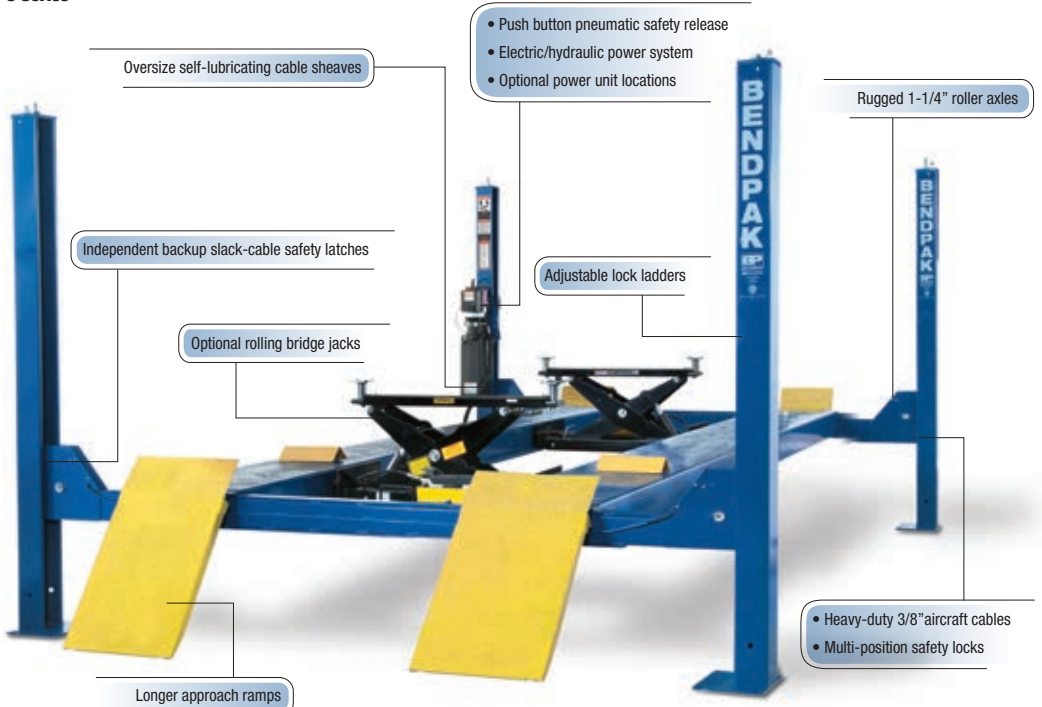

Oversize self-lubricating cable sheaves

- Push button pneumatic safety release
- Electric/hydraulic power system
- Optional power unit locations

Rugged 1-1/4" roller axles

Independent backup slack-cable safety latches

Adjustable lock ladders

Optional rolling bridge jacks

- Heavy-duty 3/8" aircraft cables
- Multi-position safety locks

Longer approach ramps



See it on the BendPak / Ranger YouTube Page

4-Post Heavy-Duty

SERIES FEATURES:

- Adjustable runway widths
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features heavy-duty aircraft cable
- Runways feature non-skid surface
- Internal "anti-sway" slider blocks in each column
- Longer ramps for low ground clearance vehicles
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Features heavy-duty sheave axles
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive through ramps option available
- 48" approach ramps available



HDS-14 Standard

Lifting Capacity - 14,000 lbs.
Max. Lift - 70" / Runway Length - 199"
Width - 130" / Length - 241"



HDS-14X Extended Length

Lifting Capacity - 14,000 lbs.
Max. Lift - 70" / Runway Length - 229"
Width - 130" / Length - 271"



HD-14T Super Tall

Lifting Capacity - 14,000 lbs.
Max. Lift - 82" / Runway Length - 199"
Width - 130" / Length - 241"



HDSO-14 Open Front Plain Deck

Lifting Capacity - 14,000 lbs.
Max. Lift - 70" / Runway Length - 199"
Width - 143" / Length - 244"



HDS-18

Lifting Capacity - 18,000 lbs.
Max. Lift - 60" / Runway Length - 203"
Width - 154" / Length - 241"



HDS-27

Lifting Capacity - 27,000 lbs.
Max. Lift - 60" / Runway Length - 263"
Width - 154" / Length - 297"




HDS-27X

Lifting Capacity - 27,000 lbs.
Max. Lift - 60" / Runway Length - 323"
Width - 154" / Length - 357"




HDS-35

Lifting Capacity - 35,000 lbs.
Max. Lift - 60" / Runway Length - 263"
Width - 154" / Length - 297"

ACCESSORIES:



Rolling Bridge Jacks



DP-30 Rolling Oil Drain



Air / Electric Work Station



Rolling Bridge Airline Kit



HDS-35X



Lifting Capacity - 35,000 lbs.
Max. Lift - 60" / Runway Length - 323"
Width - 154" / Length - 357"

HDS-40




Lifting Capacity - 40,000 lbs.
Max. Lift - 60" / Runway Length - 263"
Width - 154" / Length - 297"

HDS-40X



Lifting Capacity - 40,000 lbs.
Max. Lift - 60" / Runway Length - 323"
Width - 154" / Length - 357"

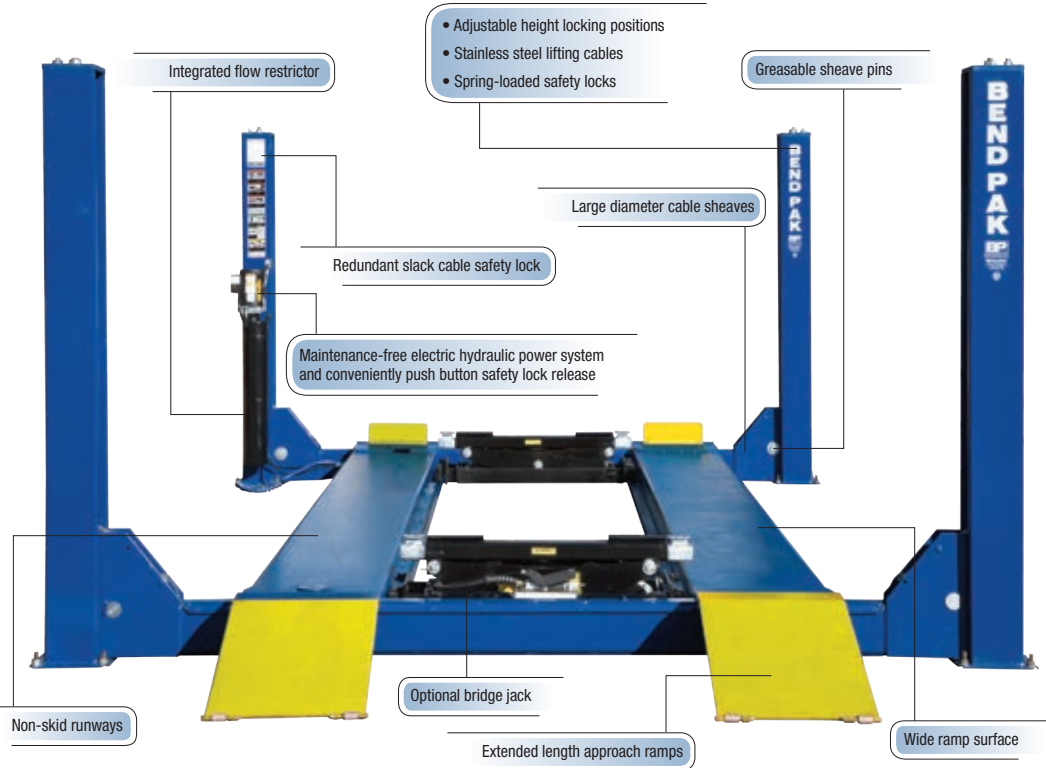

Alignment Lifts

SERIES FEATURES:

- Runways adjust to different widths
- Multi auto-level locking positions
- Single hydraulic cylinder
- Fully enclosed lifting cables and sheaves
- Pneumatic push-button safety release
- Heavy-duty aircraft cable
- Runways feature non-skid surface
- Self-lubricating cable sheaves
- Oversized sheave diameter
- Features heavy-duty sheave axles
- Fully adjustable lock stops
- Drive through ramps available
- Rolling bridge airline kit available
- Roll back kit available



Equipped with rear slip plates and galvanized front turn plates

HD-9AE



Max. 2 Wheel Align. - 160" / Max. Lift - 70"
Capacity - 9,000 lbs. / Runway Length - 188"
Width - 127" / Length - 224"



HDSO-14LSX Open Front



Max. 2 Wheel Align. - 182" / Max. Lift - 70"
Capacity - 14,000 lbs. / Runway Length - 199"
Width - 143" / Length - 244"



HDS-14LSX



Max. 2 Wheel Align. - 182" / Max. Lift - 70"
Capacity - 14,000 lbs. / Runway Length - 199"
Width - 130" / Length - 241"



HDS-14LSXE



Max. 2 Wheel Align. - 212" / Max. Lift - 70"
Capacity - 14,000 lbs. / Runway Length - 229"
Width - 130" / Length - 271"



HDS-18A



Max. 2 Wheel Align. - 151" / Max. Lift - 60"
Capacity - 18,000 lbs. / Runway Length - 203"
Width - 154" / Length - 241"



HDS-27A



Max. 2 Wheel Align. - 211" / Max. Lift - 60"
Capacity - 27,000 lbs. / Runway Length - 263"
Width - 154" / Length - 297"




Courtesy of Jay Leno's Big Dog Garage

ACCESSORIES:



Rolling Bridge Jacks



DP-30 Rolling Oil Drain



Air / Electric Work Station



Rolling Bridge Airline Kit



HD-9AE

Shown with rolling bridge jacks

- Single hydraulic cylinder
- Simple push-button lock release
- Maintenance-free power system
- Easy-to-reach operator controls

Integrated hydraulic flow restrictor

Non-skid approach ramps

Full floating galvanized turn plates

Non-skid runways

Durable powder coat finish

Recessed full floating slip plates

Optional bridge jack

Dual-hub cable sheaves

- Adjustable height locking positions
- Stainless steel lifting cables
- Spring-loaded safety locks

This is my BendPak



***There are many,
but this one's mine.***

"Nothing I do or drive is stock. Everything that comes out of my shop has to be the best. That's why me and my crew use BendPak products to customize every vehicle we touch. It's a name I trust."



- Jesse James, West Coast Choppers
www.westcoastchoppers.com

BP BendPak®
PROVIDING AUTOMOTIVE SERVICE SOLUTIONS



Quatra Scissors

SERIES FEATURES:

- 12,000 lbs. lifting capacity
- Extended runway
- Durable powder coat finish
- Multi position runway work steps
- Non-skid runways for sure grip
- Electric / hydraulic power system
- Integrated velocity fuses for cylinders
- Power console with simple controls
- Open center design
- Automatic leveling system
- Pneumatic push button release
- Lubricated bearing on all pivot points
- Rugged steel legs
- Can be flush mounted or recessed
- Easy to use and understand
- High efficiency hydraulic power unit
- Equipped with rear slip plates and galvanized front turn plates
- Straight up vertical lifting

XR-12000A Alignment




See it on the BendPak / Ranger YouTube Page

MODEL	XR-12000A Alignment	XR-12000 Standard
Lifting Capacity	12,000 lbs.	12,000 lbs.
Overall Width	86"	86"
Overall Length	243"	215"
Runway Width	24"	24"
Length of Runways	220"	192"
Max. 2-Wheel Align.	194"	N/A"
Max. Lifting Height	74"	74"

ACCESSORIES:



Rolling Bridge Jacks



DP-30 Rolling Oil Drain



Air / Electric Work Station



Rolling Bridge Airline Kit

Full floating recessed galvanized turn plates

Non-skid runways for sure grip

Collapsible front tire stops clear for low vehicle skirts and alignment instrumentation



Optional RJ-6 6,000 lb. capacity rolling bridge jacks

Lubricated-for-life bearings on all pivot points

Open center design

Durable powder coat finish will provide years of protection

XR-12000
Standard Deck




Scissors & Low-Mid Rise

STANDARD FEATURES:



MD-6XP Model
Multi Piece Adapter Set



SP-7X & All Low-Rise Models
1.5 inch Rubber Lift Blocks



Portable Models
Mobile Power Cart



SP-7X
Full Rise

Lift Pad Dimensions - 21" x 70"
Capacity - 7,000 lbs.
Height Range - 5" - 68"



MD-6XP
Mid-Rise Portable


Adjustable Arms
Capacity - 6,000 lbs.
Height Range - 5" - 48"




LR-60
Low-Rise

Lift Pad Dimensions - 18" x 53"
Capacity - 6,000 lbs.
Height Range - 4" - 26"


MD-6XP

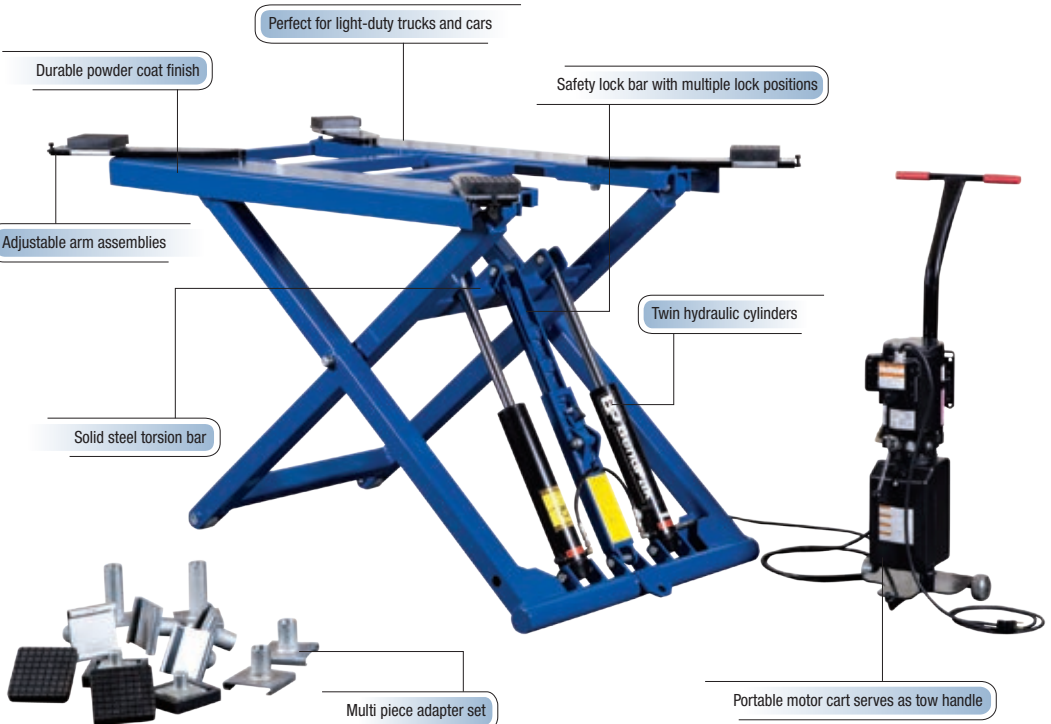

ACCESSORIES:




1.5" Rubber Lift Blocks



3" Rubber Lift Blocks



6" Rubber Lift Blocks



LR-4A Arm Kit

**LR-60P
Low-Rise Portable**



Lift Pad Dimensions - 18" x 53"
Capacity - 6,000 lbs.
Height Range - 4" - 26"



**P-6B
Open Center Pit Lift**



Lift Pad Dimensions - 18" x 53"
Capacity - 6,000 lbs.
Height Range - 4" - 26"



**P-6FB
Open Center Pit Lift
Flush Mount**



Lift Pad Dimensions - 18" x 53"
Capacity - 6,000 lbs.
Height Range - 4" - 26"



Courtesy of Northwest Auto Salon



**XR-12000
Full-Rise Open Center**



Lifting Capacity - 12,000 lbs.
Max. Lift - 74" / Runway Length - 192"
Width - 86" / Length - 249"



Courtesy of Northwest Auto Salon



Parking & Storage

SERIES FEATURES:

- Perfect for cars & light trucks
- Single hydraulic cylinder
- Dependable hydraulic design
- Easy operation
- Electric / hydraulic power system
- Automatic safety locks
- Wide deck platform for large vehicles



PLT-6S



Capacity - 6,000 lbs.
Rise - 62" / Deck Length - 135"
Width - 99" / Length - 154"

PL-6000



Capacity - 6,000 lbs.
Rise - 73" / Deck Length - 158"
Width - 110" / Length - 165"

PL-6000X



Capacity - 6,000 lbs.
Rise - 85" / Deck Length - 158"
Width - 110" / Length - 165"

PL-7000XR



Capacity - 7,000 lbs.
Rise - 85" / Deck Length - 158"
Width - 98" / Length - 174"

PL-14000



Capacity - 7,000 lbs. Per Deck
Overall Height - 281" / Deck Length - 155"
Width - 115" / Length - 194"

HDS-35PX



Capacity - 35,000 lbs.
Rise - 168" / Deck Length - 399"
Width - 186" / Length - 456"



PL-18000



Capacity - 6,000 lbs. Per Deck
Overall Height - 361" / Deck Length - 155"
Width - 115" / Length - 194"

GALLERY:



PL-7000XR

Minimum footprint allows multiple installations in limited space

- Overhead power unit provides smooth quiet hydraulic operation
- Power unit and controls integrated within the lift structure
- Automatic safety lock

Wide deck platform accommodates pickups, vans, and cars

Maintenance-free composite carriage bearings and self-lubricating chain rollers

Heavy-duty lifting chains

Designed for installation on typical parking surfaces

Wide-base plate mounts directly on ground or asphalt


Rolling Bridge Jacks

SERIES FEATURES:

- 4,500 - 25,000 lbs. lifting capacity
- Versatile drop in lifting pads
- Multi-piece adapter set standard
- Air hydraulic power unit
- Stackable adapters
- Automatic safety locks
- Wheel frame assembly for easy mobility



RJ-45



Lifting Capacity - 4,500 lbs.
Lift Pad Reach - 42" - 57"
Frame Reach - 36" - 47"

RJ-6



Lifting Capacity - 6,000 lbs.
Lift Pad Reach - 42" - 57"
Frame Reach - 36" - 47"

RJ-7



Lifting Capacity - 7,000 lbs.
Lift Pad Reach - 42" - 57"
Frame Reach - 36" - 47"

RJ-9



Lifting Capacity - 9,000 lbs.
Lift Pad Reach - 42" - 61"
Frame Reach - 45" - 50"

RJ-15



Lifting Capacity - 15,000 lbs.
Lift Pad Reach - 29" - 58"
Frame Reach - 46" - 59"

RJ-18



Lifting Capacity - 18,000 lbs.
Lift Pad Reach - 29" - 63"
Frame Reach - 45"

RJ-25



Lifting Capacity - 25,000 lbs.
Lift Pad Reach - 29" - 63"
Frame Reach - 45"

RJ-45



Portable Column Lift

SERIES FEATURES:

- 16,500 lbs. column capacity
- 66,000 lbs. maximum capacity set of 4
- 99,000 lbs. maximum capacity set of 6
- 3 modes of operation
- 70" lifting height for tall mechanics
- Extended 15" forks for wide tires
- Electronic self diagnostics functions
- Independent column control stations
- Trouble free hydraulic lifting system
- Low power consumption
- Separate key lock security
- Fuse protected
- Sealed roller bearing on carriages
- Tight turning radius
- Simple Operation
- Operator monitoring and automatic leveling control
- Automatic independent safety locks

Quick-disconnect plugs at each column

- Automatic leveling control
- Lower power consumption
- Fuse protected
- Separate key lock for each control box

3 modes of operation

Trouble-free hydraulic lifting system

User friendly controls

Low profile fork angle for easy positioning

Multi-width wheel forks with locking pins

Hydraulic jack wheel assembly allows a tight turning radius providing easy mobility

Durable powder coat finish



*Can be configured in sets of 4 or 6

PCL-16HD-4



Column Capacity - 16,500 lbs.
System Capacity - 66,000 lbs.
Lifting Height - 68"

Pipe Benders

SERIES FEATURES:

- 3-1/2" Min. bending radius
- 5" Max. bending radius
- Canister style hydraulic filter
- 5 Hp / 208 - 230 VAC motor
- Manual or automatic controls
- Drop-in swaging collars
- Twist lock tooling
- ANSI 92.2 Cylinders
- Quick release bending dies
- Bending heads to within .002"
- Bending and end finishing operation
- Adjustable back gate pressure
- 180° bending capacity
- One piece solid steel barrel
- Direct drive high speed 4 GPM pump
- Tool trays
- Large fluid reservoir
- Filtered hydraulic system
- Oil sight gauges
- 1/2" high pressure hose
- Wide variety of tooling available

BB-1



Bending Controls - Manual
Clampless Swager - Internal Expander
BB-1 Die Package Available

**1302BA-202
1302BA-302**



Bending Controls - Digital Automatic
Clampless Swager - Internal Expander
202 or 302 Die Package Available

**1502BA-202
1502BA-302**



Bending Controls - Digital Automatic
Clampless Swager - Internal Expander
202 or 302 Die Package Available

BB-2



Bending Controls - Manual
Clampless Swager - Internal Expander
BB-2 Die Package Available

**1302BAS-202
1302BAS-302**



Bending Controls - Semi-Automatic
Clampless Swager - Internal Expander
202 or 302 Die Package Available


**1502BAS-202
1502BAS-302**



Bending Controls - Semi-Automatic
Clampless Swager - Internal Expander
202 or 302 Die Package Available




**BB-1 / 202
DIE PACKAGE**



BB-1 / 202 Economy Die Package
Bending and End Forming Tooling
Sizes - 1-1/2" - 1-3/4" - 2" - 2-1/4" - 2-1/2"

**BB-2 / 302
DIE PACKAGE**



BB-2 / 302 Economy Die Package
Bending and End Forming Tooling
Sizes - 1-1/2" - 1-3/4" - 1-7/8" - 2" - 2-1/4" - 2-1/2"


ACCESSORIES:



Specialty Tooling
Available Upon Request



300-1 Die Package



300-2 Die Package




Card System CD



Rotation Dial




BB Series / 1302 Series
Top View

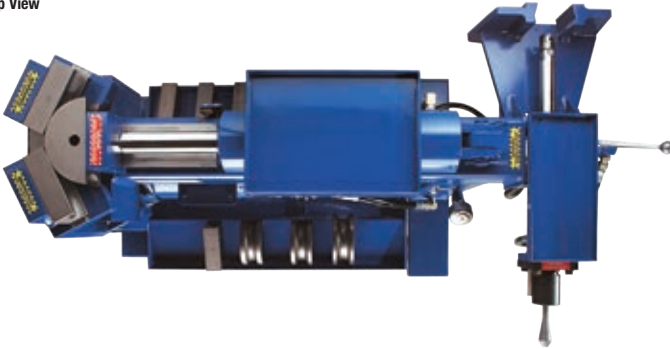

BAS Semi-Automatic Controls

1502 Series
Top View

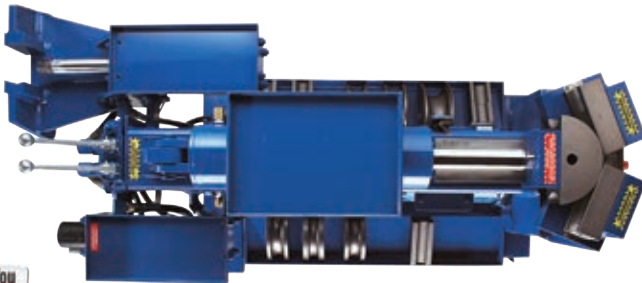

BA Digital Automatic Controls



See it on the BendPak / Ranger YouTube Page

Air Compressors

SERIES FEATURES:

- 80-Gallon vertical tank
- 3-Cylinder / 2-stage pump
- ASME rated tank
- Siemens™ electric mag-starter
- Fan-type flywheel
- Fully-enclosed belt guard
- Oversized roller bearings
- Forged ductile iron crankshaft
- Forged aluminum alloy pistons and connecting rods
- 100% cast iron block
- Cast iron cylinders and heads with deep cooling fins
- Forced-air after cooler
- Oil sight gauge
- Automatic pressure switch
- ASME rated overload pressure safety valve
- Pressure gauge with valve
- Oversized replaceable air filters
- Automatic start / stop

5 HP MODELS



LS580V-601 / 208-230 V / 60 Hz / 1 Ph
LS580V-603 / 208-230 V / 60 Hz / 3 Ph
Horsepower - 5 Hp
Maximum CFM - 22.8 / 175 psi

7.5 HP MODELS



LS7580V-601 / 208-230 V / 60 Hz / 1 Ph
LS7580V-603 / 208-230 V / 60 Hz / 3 Ph
Horsepower - 7.5 Hp
Maximum CFM - 28.5 / 175 psi



Pump cutaway

The 100% cast-iron TRI-MAX™ Series pump features simple splash lubrication for total reliability and a “W-3” finned cylinder configuration that provides 360° cooling. Lower RPM’s and large-diameter finned copper tubing between stages, means they will run cooler, which ultimately achieves maximum compressor efficiency with less moisture contamination.

Large “Finned” copper tubing helps keeps air cool between stages and to tank

Cast iron heads

Oversized balanced flywheel features large fan blades that forces cool air on the compressor pump

Deep cooling fins on the cast iron cylinders help maintain a lower operating temperature

Large mass-air filters



Tri-Max²
Extreme Duty
Industrial-Grade Air Compressor

ACCESSORIES:




Air Receiver Tank



Moisture Minder®



Moisture Minder® Kit



Anti-Vibration Pads

TriMax™ Reciprocating Air Compressors

FUSH Quiet.



IF IT GOT ANY
EASIER,
THE TIRE
WOULD CHANGE
ITSELF.



TOUCHLESS
RX3040
TIRE CHANGER.

- Never scratch another expensive rim
- Save time, increase profits
- Simple to learn, easy to master

**ALL FOR MUCH LESS
THAN YOU'D EXPECT.**

www.bendpak.com/rx3040
1-805-933-9970

ADVANCED, STATE
OF THE ART FEATURES



**TOUCHLESS, LEVERLESS
ASSISTANT TOOLS**



**UNDERSIDE CAMERA
WITH LCD MONITOR**



**AUTO-LOCATING
TOOL HEAD**

R Ranger
PRODUCTS



Wheel Service

Ranger's NextGen™ Tire Changers - Tire Shop Tested™

NextGen™ SERIES

All NextGen models are loaded with design enhancements that make the technician's job easier. Sturdy frames, rigid 45mm hexagonal vertical shafts, and hardened-steel horizontal outrigger support arms eliminate flex during all tire service procedures reducing the chance of damage to expensive wheels. Bead seating and tire inflation is simple and effortless with Ranger's exclusive TurboBlast™ portable bead seating system. High-torque electric turntables, increased speed and reversible direction means quicker tire removal and installation. Industrial-grade pneumatic control valves feature die cast and machined bodies constructed from zinc and aluminum for increased service life and performance at the highest level possible within almost every imaginable working condition. Important wheel service accessories come standard like a large soap bucket with brush and a multi-piece plastic wheel protector kit that includes turntable jaw covers, bead-breaker blade boots and specialized mount / demount head covers to help protect delicate wheels.



**R745
Swing Arm**

Internal Clamping - 12" - 21"
External Clamping - 10" - 18"
Maximum Tire Diameter - 26"



**R23LT
Tilt-Back**

Internal Clamping - 11.5" - 24"
External Clamping - 10" - 22"
Maximum Tire Diameter - 41"



**R23AT
Tilt-Back Power Assist**

Internal Clamping - 11.5" - 24"
External Clamping - 10" - 22"
Maximum Tire Diameter - 41"



**R980XR
Swing Arm**

Internal Clamping - 13" - 25.5"
External Clamping - 11.5" - 23.5"
Maximum Tire Diameter - 50"



**R980NXT
Swing Arm Power Assist**

Internal Clamping - 13" - 25.5"
External Clamping - 11.5" - 23.5"
Maximum Tire Diameter - 50"



**R26AT
Tilt-Back Power Assist**

Internal Clamping - 14.5" - 28"
External Clamping - 12.5" - 26"
Maximum Tire Diameter - 47"



**R26DT
Tilt-Back Dual Power Assist**

Internal Clamping - 14.5" - 28"
External Clamping - 12.5" - 26"
Maximum Tire Diameter - 47"



**R30XLT
Swing Arm Power Assist**

Internal Clamping - 13" - 33"
External Clamping - 10" - 28"
Maximum Tire Diameter - 50"




**R26FLT
Truck Tire Changer**

Drive System - Electric / Hydraulic
Maximum Rim Diameter - 9" - 27"
Maximum Tire Diameter - 63"

ACCESSORIES:



Reduction / Extension Clamps



Motorcycle Wheel Clamp



RWL-350 Wheel Lift



Mounting Head Adapters



Wheel Protector Kit

**RX3040
Advanced Touchless
Performance**

Ranger RimGuard™ technology means expensive wheels are handled with greater care



Full color 7" LCD monitor

Ergonomic joystick control

Pressure gauge with air pressure relief valve

Independently operated, high strength nylon dual bead rollers

Pneumatic power assisted traveling drop center/bead lifting tool

No-Mar Quick-Nut

Power-pivot arm facilitates quicker mounting and demounting operations

Infrared LED camera

Turbo-blast bead seat inflation hose

Power operated wheel lift

Convenient foot operated controls



NextGen™ SERIES

See it on the BendPak / Ranger YouTube Page



Wheel Service

RWS-55TD FEATURES:

- Handles tires up to 68" in diameter
- Large water tank
- Foot operated wheel lift
- 500-lb. capacity
- Heavy-duty all steel construction and powder coated finish
- Includes built-in drain

RV-80L / H FEATURES:

- Simple, one-man operation
- Heats tread, shoulder and sidewall
- Cures the patches and inner tire lining
- Rotating adjustable frame
- Adjustable height tower
- Contoured inner and outer curing heads
- Cures both patch and plug at the same time

TS-150 FEATURES:

- Adjustable height tire spreader
- Air-powered
- Perfect for tire inspection and repair
- Heavy-duty rollers allow tires to rotate freely
- Heavy steel construction
- Wide-base design for stability
- Powder coat finish



**RWS-55TD
Tire Dunk Tank**

Dimensions - 59" x 63" x 75"
Capacity - 500 lbs.
Foot Pedal Pneumatic Wheel Lift



**RV-80L / RV-80H
Tire Vulcanizer**

Dimensions - 57" x 22" x 14"
Heated Tire Repair / Tread & Sidewalls
Rotating Adjustable Tower



**TS-150
Tire Repair Wheel Lift**

Wheel Lift Tire Spreader
Adjustable Height Lifting
Adjustable Spreader Forks

RL-8500 / RL-8500XLT (not pictured) Combination Brake Lathe Package

Durable dual work lamps

Safety shield comes standard

**Maximum Rotor Thickness - 2.5"
Maximum Rotor Diameter - 17"**

Standard arbor provides a multitude of tooling choices

Chip funnel and chip catcher

Fully equipped tool package comes standard

Infinitely variable spindle and cross feed settings

Tool tray for your convenience

One cut micro-finish with our micro dial twin tool cutters

Rugged cast iron body

Work bench with large tool storage boards

Precision Combination Brake Station



See it on the BendPak / Ranger YouTube Page

DST-2420 / ZR-650 FEATURES:

- Dynamic, static, & performance alloy settings
- Automatic braking
- Self calibration function
- Manual or automatic start
- Low RPM balancing speed and rapid six-second cycle time
- Ergonomic control board
- Quick-release hub nut, dramatically reduces set-up times
- Easy-to-read LED display
- "Open-side" hood design for broader coverage of tire shapes and sizes
- Side cone storage pegs
- Side-position brake holds wheel for proper weight placement
- Gram / ounce selection and millimeter / inch selection
- Automatic round-off with top-dead-center weight position locator
- Precision-machined, hard steel shaft

DST-2420 Wheel Balancer



Max. Wheel Diameter - 24"
Multi Piece Cone Set
Max. Tire Diameter - 47"

ZR-650 Wheel Balancer



Max. Wheel Diameter - 30"
Multi Piece Cone Set
Max. Tire Diameter - 50"

RWL-350 Wheel Lift



Load Capacity - 350 lbs.
Pneumatic Operation
Bearing Mounted Slider

CRT380R Wireless Wheel Aligner



Visual vehicle adjustment help



"Before" and "after" measurements can be printed


Superior screen graphics with vibrant animation

Technician has the option to customize units of measurement, accuracy, language, etc.

Self-centering wheel-clamp adapters

Customer information can be stored in the database, for quick reference of previous work orders

Cordless Bluetooth® sensors remove the hassle of connecting cables

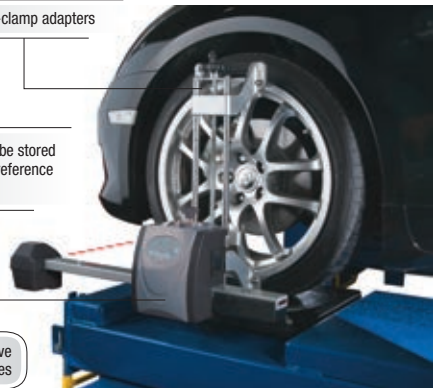

Jacks & Lifting

INFORMATION:

Ranger's wide-array of multi-purpose floor jacks just keeps getting larger and more diverse. Our current line of floor jacks has maximum capacities ranging from 2,000 to 55,000 lbs. and come in a variety of styles like quick-pump and low-profile. No matter which one you choose, Ranger floor jacks offer incredible lifting power and top notch construction that you can count on to never let you down. Our impressive line of floor jacks is carefully designed to accommodate a wide spectrum of weight capacities and lifting applications, easily lifting just about anything that needs service.

RFJ-214T



Capacity - 4,500 lbs.
Height - 5" - 19.25"
Chassis Length - 26"

RFJ-2TX



Capacity - 4,000 lbs.
Height - 3.5" - 31.5"
Chassis Length - 37"

RFJ-3T



Capacity - 6,000 lbs.
Height - 4.75" - 20.5"
Chassis Length - 28"

RFJ-3TP



Capacity - 6,000 lbs.
Height - 5.25" - 19.25"
Chassis Length - 26"

RFJ-3TQP



Capacity - 6,000 lbs.
Height - 5" - 19.75"
Chassis Length - 25.5"

RFJ-6HD



Capacity - 6,000 lbs.
Height - 3.625" - 21"
Chassis Length - 27"

RFJ-3000AL



Capacity - 3,000 lbs.
Height - 3.5" - 17.75"
Chassis Length - 24"

RFJ-3000LPF




Capacity - 3,000 lbs.
Height - 2.75" - 24"
Chassis Length - 34"



RFJ-3000LPF

GALLERY:



RFJ-10TL



Capacity - 20,000 lbs.
Height - 7" - 23"
Chassis Length - 61"

RST-2TCB
Floor Jack Crossbeam



Capacity - 4,500 lbs.
Saddles Adjustment - 23" - 32"
Dimensions - 6" x 27" x 6"

RBJ-25TL



Capacity 1st Stage - 55,000 lbs.
Capacity 2nd Stage - 20,000 lbs.
Height - 7.125" - 14.75" / Chassis Length - 30"

RTJ-660



Capacity - 660 lbs.
Height - 51" - 73"
Base - 30" x 30"

RTJ-1100



Capacity - 1,100 lbs.
Height - 45" - 72"
Base - 24" x 24"

RTJ-1
The original
TransJack



Capacity 1st Stage - 2,000 lbs.
Capacity 2nd Stage - 1,000 lbs.
Height - 37" - 79.5" / Base - 39" x 39"

RTJ-3000



Capacity 1st Stage - 3,000 lbs.
Capacity 2nd Stage - 2,000 lbs.
Height - 37" - 79.5" / Base - 45" x 45"



RFJ-3000LPF

Jacks & Lifting

SERIES FEATURES:

- Welded steel construction for maximum durability
- Safety ratchet design assures stands remain locked under load
- Perfect for holding drive-train or exhaust components in position
- Sold in pairs
- Quick adjust spin handle with thrust bearing
- Wide base provides maximum stability
- Thick, rubber adjustable pad for maximum support
- Convenient handle and column release
- Hardened ACME screw for easy adjustment
- Tripod design evenly distributes weight



Holding Capacity - 6,000 lbs.
Height - 11.5" - 17"
Base Dimensions - 7" x 7.5"



Holding Capacity - 12,000 lbs.
Height - 15.5" - 24.5"
Base Dimensions - 9" x 10.5"



Holding Capacity - 24,000 lbs.
Height - 20" - 30.5"
Base Dimensions - 14.5" x 13"



Holding Capacity - 1,650 lbs.
Height - 54.5" - 80.5"
Base Dimensions - 12"



Holding Capacity - 1,650 lbs.
Height - 54.5" - 80.5"
Base Dimensions - 12"



Lifting Capacity - 150 lbs.
Lifting Height - 36"
Air Requirement - 90 - 150 psi



Holding Capacity - 4,000 lbs.
Height - 55" - 87"
Base Dimensions - 24" x 24"



Holding Capacity - 16,000 lbs.
Height - 54" - 8"
Base Dimensions - 32"



RWS-150WL

Motorcycle Lifts

RML-600XL FEATURES:

- Constructed out of 12-gauge steel
- Pneumatic lifting cylinder
- Durable powder-coat finish
- Adjustable front wheel vise
- Drop-away rear wheel deck
- Easy ramp(s) removal
- Front and side extensions standard

RML-750HD / RML-1500XL:

- Built-in retractable swivel casters
- Full travel automatic safety locks
- Single hydraulic lifting cylinder
- Heavy 12-gauge steel construction
- Side extensions come standard
- Air or hydraulic pump operation
- Multiple locking positions

RML-1100

- Capacity - 1,100 lbs.
- Height - 3.5" - 16"
- Dimensions - 6" x 17.75"
- Low-profile design
- Works on the ground
- Works as a platform motorcycle lift
- Includes 2 adjustable saddle adapters



RML-600XL

Lifting Capacity - 1,000 lbs.
Height - 7" - 31.5" / Table Width - 24" - 44"
Table Length - 79" - 98"



RML-750HD


Lifting Capacity - 1,500 lbs.
Height - 7" - 43" / Table Width - 29.5" - 53"
Table Length - 80.5" - 88.5"



**RML-1500XL
Super Stretch**

Lifting Capacity - 1,500 lbs.
Height - 7" - 43" / Table Width - 30" - 53"
Table Length - 89" - 100"

RML-1500XL Super Stretch

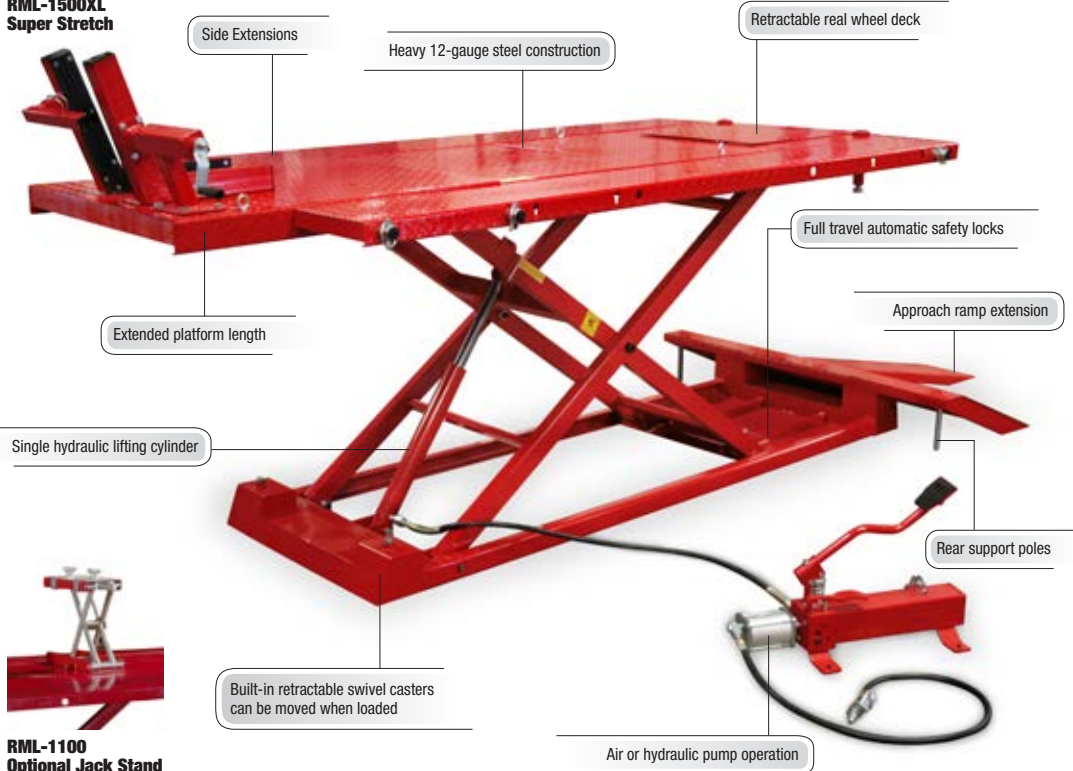

RML-1100 Optional Jack Stand

Tool Storage & Benches

INFORMATION:

Ranger Toolboxes and tool chests are gaining popularity by the day in automotive shops and private garages. That's because our tool storage solutions are built to the strictest specifications, featuring high-grade 16 and 18-gauge steel construction, durable internal cages, high-quality welds, all the best drawer hardware and a masterful cherry-red powder coat finish that looks better than any stock paint job on the market—and it'll last forever to boot.

Without question, for your projects to get completed on time and to your satisfaction, you require a dedicated work area. So Ranger developed a line of large, heavy-gauge steel workbenches, specifically designed to handle the physical rigors of being in a busy garage or shop. We currently offer three sizes and styles to suit your needs and space restraints.



RTB-7DC

Number of Drawers - 7
Unit Dimensions - 29" x 40" x 18"
Mates with RTB-2D / RTB-9D / RTB-10D



RTB-13DC

Number of Drawers - 13
Unit Dimensions - 47.5" x 40" x 19"
Mates with RTB-8D



RTB-2D

Number of Drawers - 2
Unit Dimensions - 26.5" x 10.5" x 12.25"
Mates with RTB-9D / RTB-7DC / RTB-10D



RTB-8D

Number of Drawers - 8
Unit Dimensions - 41.5" x 19" x 18.5"
Mates with RTB-13DC



RTB-8DT

Number of Drawers - 8
Unit Dimensions - 41.5" x 19.5" x 18.5"
Mates with RTB-13DC



RTB-9D

Number of Drawers - 9
Unit Dimensions - 26" x 17" x 12"
Mates with RTB-2D / RTB-10D



RTB-10D

Number of Drawers - 10
Unit Dimensions - 26" x 19" x 16"
Mates with RTB-2D / RTB-7DC



RWB-2D FEATURES:

- Electrostatic triple-baked protective powder coat
- Rolled edges for added strength and rigidity
- Full-extension ball bearing drawer slides
- Tumbler key-lock pivot drawer latching system

RWB-2S FEATURES:

- Glossy red finish
- Electrostatic oven-baked powder coat
- Rolled edges for added strength and rigidity
- 5/32" HD rolled edge steel table top
- 3/32" HD rolled edge steel shelves
- 12-gauge construction

RWB-1TD FEATURES:

- Lockable heavy-duty drawer
- 500-lb. working capacity
- Heavy-duty 4" casters
- Adjustable working height
- Removable polyethylene fluid drain
- 14-gauge table top
- 3/4" liquid containing rim

RWB-2D



Height - 34.5"
Width - 59"
Depth - 25.25"

RWB-2S



Height - 34.5"
Width - 79"
Depth - 25.25"

RWB-1TD



Height - 34.5"
Width - 79"
Depth - 25.25"

RTB-8D / RTB-13DC Shown as combo



Protective rubber mat

Heavy-gauge steel body

Brushed aluminum drawer handles

Electrostatic oven baked powder coat finish

Rolled edges for added strength and rigidity

Chrome side handles

Full-extension ball bearing drawer slides

2 heavy-duty fixed urethane casters and 2 heavy-duty swivel urethane casters with brake

Shop Equipment

INFORMATION:

Let Ranger Products lighten the load with our considerable line of high-quality rolling equipment. All Ranger Carts and Dollies are made from high-gauge steel and employ only the best casters for easy maneuvering. Our service carts, chassis-mount vehicle dollies, low-profile automobile carts and rolling adjustable work tables come fully equipped to make your day in the garage infinitely easier. Don't lift or carry—roll with Ranger!

Ranger's industrial shop presses offer you the versatility of professional-grade hydraulic force, whether you're at the shop or in your own garage. Among other operations, all Ranger Hydraulic Presses are ideal for the removal and installation of gears, bushings and bearings—so you can bend, straighten, flatten, crush, press, shape, push, pull, lift and spread like you were born doing it.

RCD-1TD
Auto Carts



Capacity - 1,000 lbs. (Each)
Dimensions - 15.5" x 23.5"
3.5" Cast Iron Ball Bearing Casters

RCD-65



Load Capacity - 55 lbs.
Shipping Weight - 38 lbs.
Shipping Dimensions - 30" x 26" x 6"

RCD-3TR



Tray Dimensions - 16" x 32"
Shipping Weight - 40 lbs.
Shipping Dimensions - 31" x 17" x 6"

RCD-1V
Vehicle Dolly



Lifting Capacity - 1,500 lbs.
Overall Height - 12"
Caster Size - 4.5"

RP-10TP
Porta Power



Capacity - 10 Tons
Stroke Ram - 6"
Hose Length - 6'

RP-20T



Capacity - 40,000 lbs.
Cylinder Stroke - 8"
Width - 27" / Height - 61"



RCD-1500
GoCart™
Vehicle Dolly



Load Rating Each - 1,500 lbs.
Wheel Size Capacity - 8" - 24"
Tire Diameter Capacity - 15" - 28"



GoCart™
Storage Rack



Load Rating - 200 lbs.
Tire Width Capacity - 12"
Holds up to 4 GoCart™ Dollies

RP-20HD



Capacity - 40,000 lbs.
Cylinder Stroke - 5.5"
Width - 37" / Height - 60.25"

SERIES FEATURES:

- Wall, floor, or ceiling mount
- Use for air or water
- Powder coated for corrosion free performance
- Solid brass swivel fitting
- Guide arms adjusts to 9 positions
- 4 direction, non-snag rollers
- Multi-position release ratchet
- Anti-lock out ratchet mechanism prevents reel from locking up when hose is fully extended
- Reinforced mounting base



RH-33SL

Air Pressure - 300 psi
Hose Length - 33'
Fittings - 3/8"




RH-50SL

Air Pressure - 300 psi
Hose Length - 50'
Fittings - 3/8"



RH-50PL


Air Pressure - 300 psi
Hose Length - 50'
Fittings - 3/8"



RH-50PM

Air Pressure - 3,000 psi
Hose Length - 50'
Fittings - 3/8"

RH-50PL

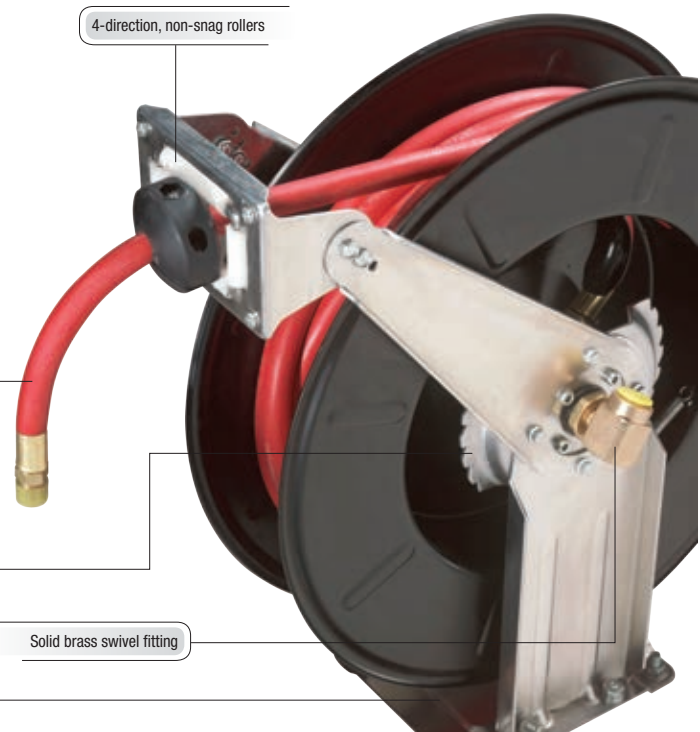

4-direction, non-snag rollers

Use for air or water

Anti-lock out ratchet mechanism prevents reel from locking up when hose is fully extended

Solid brass swivel fitting

Wall, floor, or ceiling mount with a 7" x 8" reinforced mounting base

Shop Equipment

SERIES FEATURES:

Oil Drains

- Lightweight for easy portability
- Safe and easy to use
- Non-corrosive telescoping tube
- Heavy-duty stainless steel clamp
- Built-in hand grips
- Durable steel construction

- Tough construction will resist dents, rust, and corrosion
- Rugged funnel with built-in contamination screen

Oil Filter Crushers

- Reduces cans up to 20%
- Reduces filters up to 25%

- Crushes cans in only 20 seconds
- 100% air operated
- Fulfills EPA and other mandated environmental standards
- Removes up to 95% of the oil
- Compact floor or bench-mount design
- All-steel industrial construction

RD-8G



Capacity - 8 gal.
Height - 45" - 72"
Funnel Diameter - 18"

RD-18G



Capacity - 18 gal.
Height - 48" - 72"
Evacuation Pump

RD-15



Capacity - 15 gal.
Height - 8.5"
Shipping Weight - 52 lbs.

**RD-20SE
Air Evac
Oil Drain**



Capacity - 20 gal.
Height - 52" - 83"
Funnel Diameter - 16"

**RP-20FCS
Stand**



Capacity - 230 lbs.
Unit Weight - 72 lbs.
Dimensions - 27.75" x 42" x 17.75"

**RP-6KC
Paint Can
Crusher**



Capacity - 3 Ton / Cycle Time - 15 - 20 sec.
Air Requirements - 140 - 160 psi
Dimensions - 15" x 37" x 14"

**RP-20FC
Oil Filter
Crusher**



Capacity - 10 Ton / Cycle Time - 15 - 20 sec.
Air Requirements - 125 - 175 psi
Dimensions - 17" x 29.5" x 17"



RS-500 / RS-750 FEATURES:

- Heavy-duty steel construction
- Removable tank screen
- Stainless oil skimmer
- Removable parts tree
- Powder coat finish
- Brass nozzles
- Full opening octagonal door
- Large drain pipe
- Heavy-duty rubber casters
- Friction-drive turntable system
- Gasket-free door
- Small parts basket
- Stainless steel handles
- Free bucket of soap included

SOAP FEATURES:

- Non-foaming soap
- Low pH
- Mild alkali
- Water soluble
- Specially formulated
- Removes grease, oil, stains, carbon, protein, and some paints



RS-750



Shop Equipment

SERIES FEATURES:

Small Material Bender

- Heavy steel construction
- Perfect for bending solid, round and flat steel bars or tubing
- Must have for muffler shops
- Bends virtually all small tubing and square stock sizes

Rolling Creeper/Work Seat

- Padded center cushion and headrest
- Swivel casters for easy maneuverability
- Relieves sore back muscles
- Work more efficiently
- Sturdy steel tubing construction
- Low profile design

Tire Changers

- Rubber grip handles
- Perfect for home or shop use
- Portable and easy-to-use
- Heavy steel construction
- Self-leveling stand
- Efficient operation at a fraction of cost

RB-1ST
Small Material Bender



Maximum Bending Depth - 90°
Tubing Sizes - 1/4" - 3/8" - 1/2" - 5/8"
Shipping Weight - 32 lbs.

RST-1C
Creeper



Weight Capacity - 350 lbs.
Steel Tubing - 3/4"
Swivel Casters - 2.5"

RST-1WS
Rolling Work Seat



Steel Tubing - 1"
Swivel Casters - 2.5"
Shipping Weight - 10 lbs.

RWS-1B
Bubble Balancer



Hub Hole Diameter - 1.5" - 4.5"
Calibrated at - 90° - 180° - 270° - 360°
Width - 12" / Height - 23"

RWS-2TC
Mini Tire Changer



Tire Capacity - 4" - 12"
Shipping Weight - 14 lbs.
Shipping Dimensions - 22" x 7" x 6"

RWS-3TC



Heavy steel construction

Performs both mounting and bead breaking operations

Portable and easy to use

Perfect for home or shop use

RWS-3TC
Manual Tire Changer



Tire Capacity - 8" - 7.5" x 16"
Wheel Plate Diameter - 7.5"
Base Dimensions - 15" x 18"

RST-500ES / RST-500ESD

- Adjusts to fit all vehicles
- Rubber foot pads to hold load securely
- Straddles inner fender wells
- Precisely positions engine for easy gear box and transmission removal
- Perfect for 4 and 6 cylinder engines
- 1,100 lb. & 1,500 lb. capacity

RES-1TF FEATURES:

- Folds upright to conserve space
- Heavy steel construction
- Long rubber-grip handle
- Head swivels 360° for easy positioning
- Heavy-duty swivel casters
- Slotted adjustable saddle permits
- Neck is reinforced for extra strength

RSC-2TF FEATURES:

- Designed for shops with limited space
- Folds for easy storage
- Heavy-duty steel casters
- Neck is reinforced for extra strength
- Wide base for maximum stability
- Telescoping boom provides 4 positions
- Heavy steel construction

RST-500ES Engine Support



Holding Capacity - 1,500 lbs.
Screw Travel - 18.75"
Width - 26.5" - 49.5"

RES-1TF Engine Stand



Holding Capacity - 2,000 lbs.
Front Width - 31" / Rear Width - 27.5"
Height - 37.5" / Length - 41"

RSC-2TF Folding Shop Crane



Boom Length - 40" - 63"
Boom Capacity - 1,100 - 4,400 lbs.
Boom Height - 80" - 93"

RST-500ESD Engine Support



Holding Capacity - 1,100 lbs.
Screw Travel - 13"
Maximum Adjustable Width - 57"

RES-1TF




RST-500ESD



Manufacturing Superiority

BendPak recognizes the manufacturing process as our moment of maximum influence. When we ship a piece of equipment, we need to know that the product that left our manufacturing complex was the best it could be. That's why we demand nothing short of the very finest in facilities and machinery. Our primary factory houses development and manufacturing for medium and heavy-duty lifting products and wheel service models. At just over 300,000 square foot it's a facility designed for maximum efficiency and safety, where we employ the best steel fabrication techniques in the world.

Main Production Facility

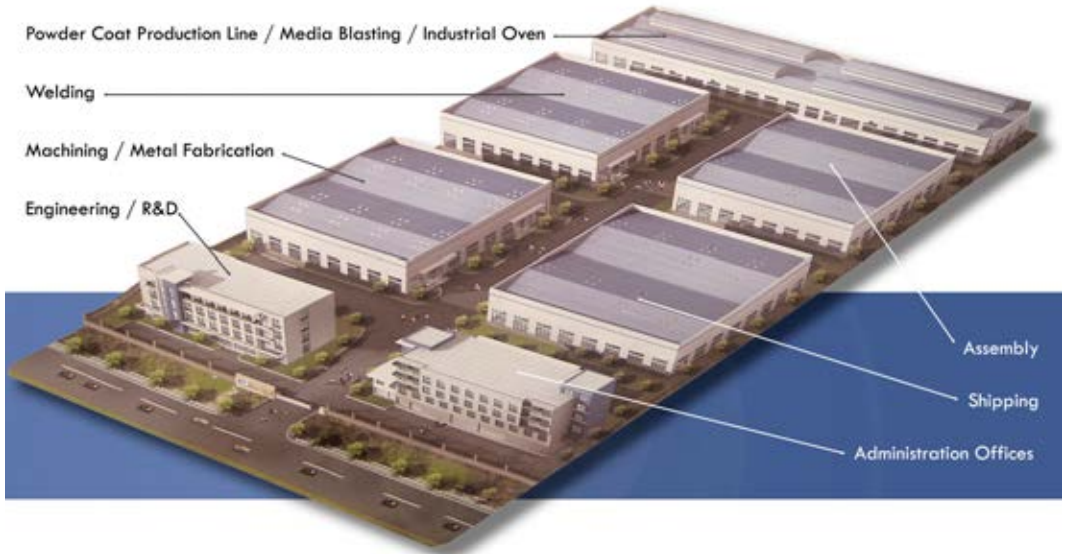

MEDIUM AND HEAVY-DUTY PRODUCTS

BendPak's second mega-sized manufacturing is used primarily for manufacturing light and medium duty lift products, select parking systems, and select vehicle repair tools and equipment. The multiplex factory houses state-of-the-art equipment including numerically-controlled turning and milling equipment, automated welding systems and full-capability services like comprehensive metallurgy testing, heat treatment, automated powder coating, and other specialty operations. The facility also houses assembly and packaging operation centers and product development testing labs for BendPak's growing customer base around the globe.



LIGHT AND MEDIUM-DUTY LIFT PRODUCTS

Our multi-department manufacturing complexes have allowed us to expand machinery and employees and triple our daily production capacity. All BendPak employees are Q.C. trained and follow rigid ISO-9001 guidelines. Every day, more than 700 employees around the world dedicate themselves to putting our core values into action. Safety is first—it's our company's top priority, followed closely by environmental responsibility, cost-efficiency, quality, customer service and accountability for all departments. These principles guide our highly skilled workforce towards BendPak's unified vision.

Across the globe, BendPak's facilities encompass over 600,000 square feet in total and consist of vertically integrated manufacturing, operations and logistics facilities. Each location follows strict guidelines as outlined by ISO-9000, further supporting our position as a premier global manufacturer. At BendPak, we ensure that our offshore manufacturing is no different in approach, standards, quality, inspection or packaging from our domestic production. These facilities are audited year round and undergo systematic evaluation of documented quality programs such as TUV, ANSI/ALI ALCTV, CSA, UL and AS/NZS 1418.9. The programs themselves are audited quarterly, regardless of the facility location, to ensure continued compliance with all applicable standards.



BendPak, Ranger Products and BendPak / Ranger related marks are trademarks and/or registered trademarks of BendPak Inc.



Inquire about these certification listings.



1645 Lemonwood Drive • Santa Paula, CA USA 93060

Tel: 1-805-933-9970 • Fax: 1-805-933-9160 • www.bendpak.com