

# HD-7500BLX



## Four-Post Lifts

SKU# 5175315

7,500-lb. Capacity / Vehicle and Boat Storage Lift / 82" Rise

Questions? Contact BendPak's Sales Team

sales@bendpak.com | 1-800-253-2363

Monday - Friday, 7AM to 4:30PM PST

## The Perfect Boat Storage Lift

Never trust your precious boat to the unpredictability of the water, nor should you pay for dry docks and/or yard storage. Salt water corrosion, barnacles, rust damage, rub marks, coating blemishes, rot and cold weather can do irreversible harm caused to your boat's engine and interior. The longer you go without a boat storage lift, the more you leave yourself open to catastrophe.

BendPak has the perfect solution: Keep your boat up in the air and out of the water. Because it features adjustable runways that accommodate cars and trucks, the HD-7500BLX pulls double-duty as a professional-grade car lift for vehicles.

### No more docking fees

A boat lift is a great way to shield yourself from monthly boata storage fees. The larger the boat, the bigger the bill, so there's no better way to keep your boat safe than to store it in your own garage.

### Fits most boat trailers


Wide and narrow installations help accommodate virtually all boat trailer types.

## Features

- 7,500-pound lifting capacity
- Two different lifting heights to choose from
- Electric / hydraulic power system
- Internal anti-sway slider blocks in each column
- Both models feature heavy-duty 3/8" aircraft cable
- Multi-position safety locks in each column
- Ramps feature non-skid surface
- Runways include rail-kit for optional accessories
- Single hydraulic cylinder underneath runway
- Over-sized self-lubricating cable rollers
- Rugged 1-1/4" roller axles
- Adjustable lock ladders
- Push-button pneumatic safety release
- Durable powder coat finish

Note: An air supply (minimum 30 psi / 3 CFM) is required for the safety-lock mechanisms to disengage. It is solely the responsibility of the end-user to provide, install and maintain the air supply.

Not all BendPak lift models meet the standards as prescribed by ANSI/ALI ALCTV-2017 or ANSI/UL 201. Consult [www.autolift.org](http://www.autolift.org) for a complete list or contact BendPak via [contact@bendpak.com](mailto:contact@bendpak.com).

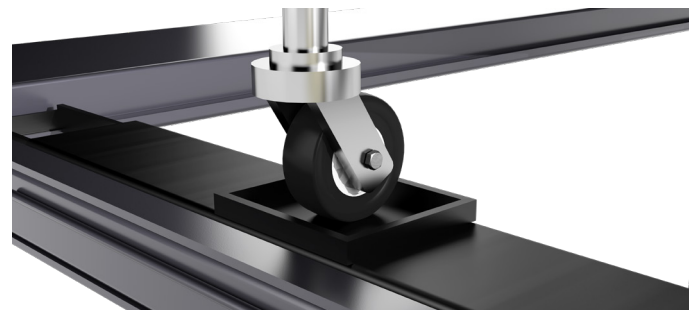

# HD-7500BLX



## Four-Post Lifts

SKU# 5175315


7,500-lb. Capacity / Vehicle and Boat Storage Lift / 82" Rise

Questions? Contact BendPak's Sales Team

sales@bendpak.com | 1-800-253-2363

Monday - Friday, 7AM to 4:30PM PST

## Specifications

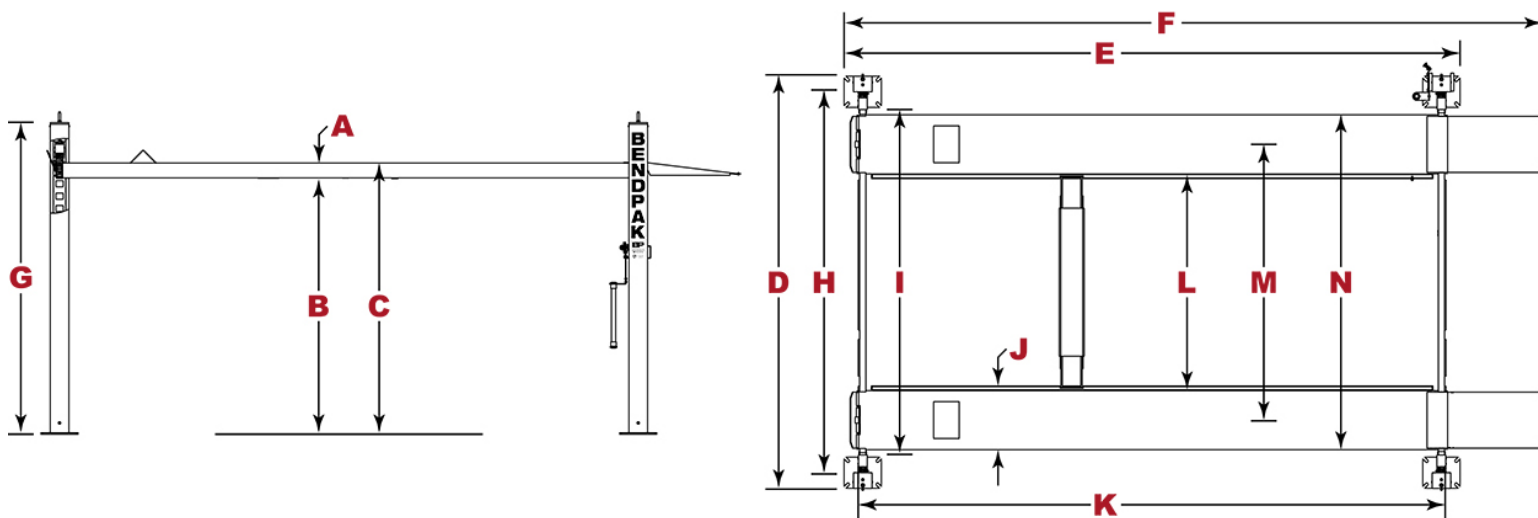

<b>Model</b>	<b>HD-7500BLX</b>
<b>Style</b>	Vehicle / Boat Storage Lift
<b>SKU#</b>	5175315
<b>Lifting Capacity</b>	7,500 lbs. (3,402 kg)
<b>A - Min. Runway Height</b>	5" (127 mm)
<b>B - Max. Rise</b>	82" (2,083 mm)
<b>C - Max. Lifting Height</b>	87" (2,210 mm)
<b>D - Overall Width</b>	132" (3,353 mm)
<b>E - Outside Length</b>	198" (5,029 mm)
<b>F - Overall Length</b>	224" (5,690 mm)
<b>G - Height of Columns</b>	158" (4,013 mm)
<b>H - Width Between Columns</b>	122" (3,099 mm)
<b>I - Drive-Thru Clearance</b>	108.5" (2,756 mm)
<b>J - Runway Width</b>	19" (483 mm)
<b>K - Length of Runways</b>	188.5" (4,788 mm)

<b>L - Width Between Runways</b>	49.5" (1,257 mm) or 69.5" (1,765 mm)
<b>M - Runway Centerline</b>	68.5" (1,740 mm) or 88.5" (2,248 mm)
<b>N - Outside Edge of Runways</b>	87.5" (2,223 mm) or 107.5" (2,731 mm)
<b>Min Wheelbase @ Capacity</b>	135" (3,429 mm)
<b>Min Wheelbase @ 75% Capacity</b>	115" (2,921 mm)
<b>Min Wheelbase @ 50% Capacity</b>	95" (2,413 mm)
<b>Min Wheelbase @ 25% Capacity</b>	80" (2,032 mm)
<b>Time to Full Rise</b>	55 sec
<b>Locking Positions</b>	15
<b>Lock Spacing</b>	every 4" (102 mm)
<b>Motor</b>	220 VAC / 60 Hz / 1 Ph

Note: An air supply (minimum 30 psi / 3 CFM) is required for the safety-lock mechanisms to disengage. It is solely the responsibility of the end-user to provide, install and maintain the air supply.

Not all BendPak lift models meet the standards as prescribed by ANSI/ALI ALCTV-2017 or ANSI/UL 201. Consult [www.autolift.org](http://www.autolift.org) for a complete list or contact BendPak via [contact@bendpak.com](mailto:contact@bendpak.com).