



Brand: BendPak
Models: XPR-10C / XPR-10CX
Description: Clearfloor Two-Post Lifts


- 10,000-pound lifting capacity
- Wide or narrow configuration
- Single piece columns
- Single point safety release
- Dual hydraulic "Direct-Drive" cylinders
- Oversize 53" tall carriage for superior strength and durability
- Drop-end arms provide a lower pad height
- Triple-telescoping arms provide increased range for lifting point access
- Electric/hydraulic power system
- Large, 19" x 17" steel base plates
- Self-lubricating dura-glide polyethylene bearing system
- Safety locks in each column spaced every 3-inches
- Automatic arm restraints
- Heavy-duty dual 3/8" equalizer cables with oversize cable sheaves
- Padded overhead safety-shutoff bar
- Truck and van adapters standard



MODEL	XPR-10C	XPR-10CX
Lifting Capacity*	10,000 Lbs. / 4536 Kg.	10,000 Lbs. / 4536 Kg.
*Max Capacity / Front Axle	5,000 Lbs. / 2268 Kg.	5,000 Lbs. / 2268 Kg.
*Max Capacity / Rear Axle	5,000 Lbs. / 2268 Kg.	5,000 Lbs. / 2268 Kg.
A - Height Overall: (*)	145" / 3683 mm.	145" / 3683 mm.
B - Width Overall (Outside of Base Plate):	132" / 3353 mm.	145" / 3683 mm.
C - Width (Outside of Columns):	124" / 3150 mm.	137" / 3480 mm.
D - Floor To Overhead Switch: (*)	141" / 3581 mm.	141" / 3581 mm.
E - Inside Columns:	102" / 2791 mm.	115" / 2921 mm.
F - Reach (Front Arm Min.):	25" / 635 mm.	28" / 711 mm.
G - Reach (Front Arm Max.):	46" / 1168 mm.	55" / 1397 mm.
H - Reach (Rear Arm Min.):	34" / 864 mm.	34" / 864 mm.
I - Reach (Rear Arm Max.):	55" / 1397 mm.	55" / 1397 mm.
J - Min. Pad Height:	4" / 102 mm.	4" / 102 mm.
K - Rise:	69" / 1753 mm.	69" / 1753 mm.
L - Max Lift Height (Pad Only):	73" / 1854 mm.	73" / 1854 mm.
M - Max Lift Height (6" Adapter):	79" / 2007 mm.	79" / 2007 mm.
N - Drive-Thru Clearance:	93" / 2362 mm.	106" / 2692 mm.
Motor (**)	220 VAC / 60 Hz. 1Ph.	220 VAC / 60 Hz. 1Ph.
Time of full Rise:	45 Seconds	45 Seconds
Max Load Per Arm:	2,500 Lbs. / 1134 Kg.	2,500 Lbs. / 1134 Kg.
* An optional bolt-on top extension for columns raises the overhead bar an additional 24". Must be ordered from factory at time of order.		
** Special Voltages Available Upon Request.		
The design, material and specifications are subject to change without notice.		

BendPak, BendPak Incorporated and Ranger Products and their respective logos are registered trademarks. Copyright 2005 BendPak Incorporated

BendPak / Ranger, 1645 Lemonwood Dr., Santa Paula, CA 93060
 Tel: 1-805-933-9970 Fax: 1-805-933-9160

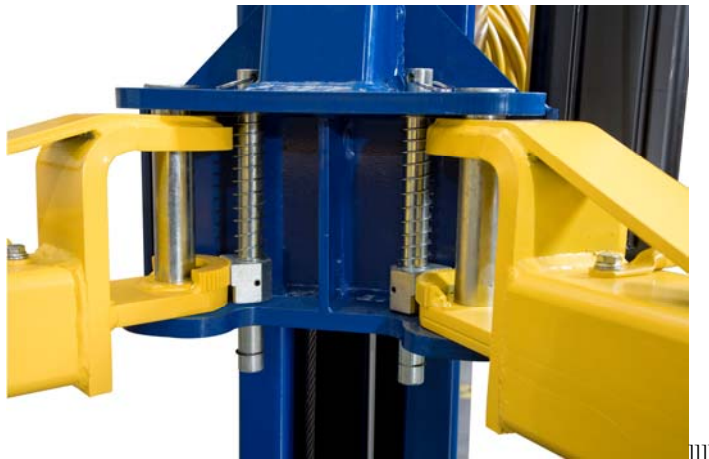

BendPak, BendPak Incorporated and Ranger Products and their respective logos are registered trademarks. Copyright 2005 BendPak Incorporated

BendPak / Ranger, 1645 Lemonwood Dr., Santa Paula, CA 93060
Tel: 1-805-933-9970 Fax: 1-805-933-9160