




PRINTER FRIENDLY PAGE

Brand: BendPak
Models: XPR-9D
Description: Floorplate Style Two-Post Lift / Direct Drive

- 9,000-pound lifting capacity
- Adjustable width design configures for wide or narrow installation
- Direct-drive lifting system eliminates chains and pulleys
- Dual hydraulic lifting cylinders
- Single-piece columns
- Single point safety release
- Drop-end arms provide a lower pad height
- Triple-telescoping arms provide increased range for lifting point access
- Electric/hydraulic power system
- Large, 20" x 19" steel base plates
- Self-lubricating dura-glide polyethylene bearing system
- Safety locks in each column spaced every 3-inches
- Automatic arm restraints
- Heavy-duty dual 3/8" equalizer cables with oversize cable sheaves
- Truck and van adapters standard


**FREE 8-Pc.Truck
Adapter Set**


MODEL	XPR-9D
Lifting Capacity*	9,000 lbs. / 4082 kg.
*Max Capacity / Front Axle	4,500 lbs. / 2041 kg.
*Max Capacity / Rear Axle	4,500 lbs. / 2041 kg.
A - Height Overall: (*)	145" / 3683 mm.
B - Width Overall: (NARROW CONFIGURATION)	132" / 3353 mm.
B - Width Overall: (WIDE CONFIGURATION)	145" / 3683 mm.
C - Width Outside of Columns: (NARROW CONFIGURATION)	126-3/4" / 3225 mm.
C - Width Outside of Columns: (WIDE CONFIGURATION)	139-3/4" / 3555 mm.
D - Floor Pan Height:	1-3/4" / 44 mm.
E - Inside Columns: (NARROW CONFIGURATION)	105" / 3208 mm.
E - Inside Columns: (WIDE CONFIGURATION)	118" / 3538 mm.
F - Reach (Front Arm Min.):	27-1/2" / 698 mm.
G - Reach (Front Arm Max.):	51-1/2" / 1308 mm.
H - Reach (Rear Arm Min.):	34" / 863 mm.
I - Reach (Rear Arm Max.):	54-1/2" / 1384 mm.
J - Min. Pad Height:	4" / 102 mm.
K - Rise:	69" / 1753 mm.
L - Max Lift Height (Pad Only):	73" / 1854 mm.
M - Max Lift Height (6" Adapter):	79" / 2007 mm.
N - Drive-Thru Clearance: (NARROW CONFIGURATION)	93" / 2362 mm.
N - Drive-Thru Clearance: (WIDE CONFIGURATION)	106" / 2692 mm.
Motor (**)	220 VAC / 60 Hz. 1Ph.
Time of full Rise:	45 Seconds
Max Load Per Arm:	2,250 Lbs. / 1021 Kg.

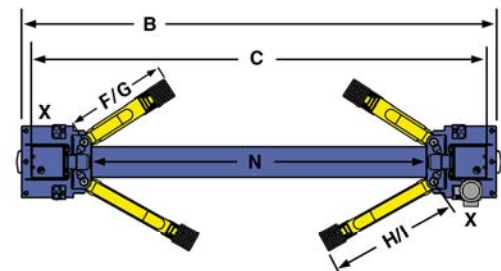

NOTE: Power unit can be located at either X location.

